

RL-BH3020-OV

HIGH-EFFICIENCY

LED BULKHEAD SOLUTION



Sealing design



80lm/W



5 YEARS
Warranty



IP65



IK08



100-240V



50,000H
LIFESPAN



-20°C~+45°C




Easy
Installation



0/1-10V/DALI
DIMMING



Dimension(MM)

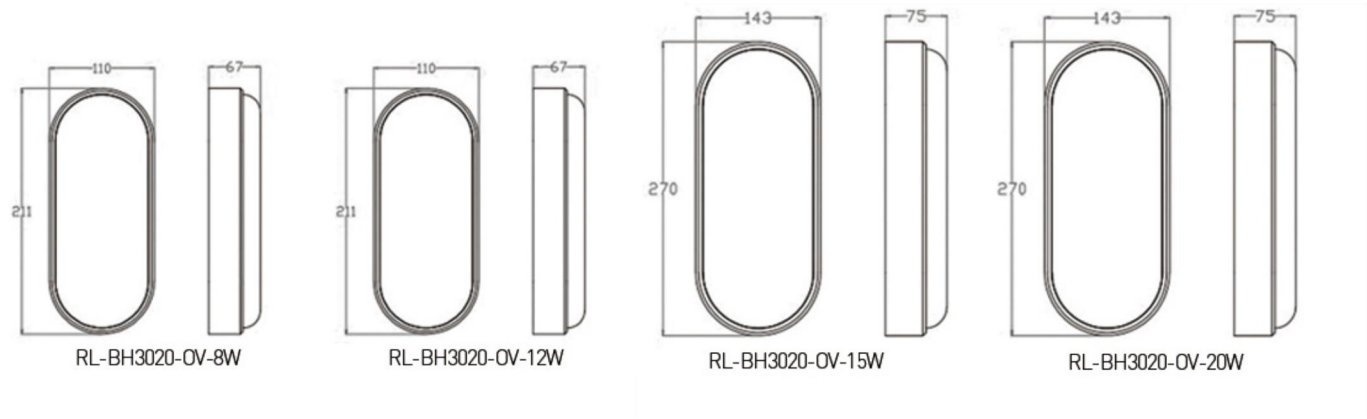

Parameters

Model NO.	RL-BH3020-OV			
LED Consumption	8W+1.0W	12W+1.2W	15W+1.5W	20W+2W
System consumption	8W	12W	15W	20W
Input voltage	AC 100-260V			
Power factor	>0.5			
Output current	240MA			
Luminous	800LM	1200LM	1500LM	2000LM
CRI	Ra>70/80			
Color temperature	2800-3000K/4000-4500K/6000~650			
Working temperature	-20			
Storage temperature	-30°C-55°C			
IP Grade	IP54			
Working life-span	50000 hours			
Beam angle	120°			
Color	BLACK/WHITE			
Warranty	5 YEARS			
DIM.OP	0-10V/1-10V/ DALI			

Photometric diagrams

