

RL-BH3020-RD
HIGH-EFFICIENCY
LED BULKHEAD SOLUTION



Sealing design

80lm/W

5 YEARS
Warranty

IP65

IK08

100-240V


LIFESPAN
50,000H

-20°C~+45°C

Easy Installation

DIMMING
0/1-10V/DALI

Dimension(MM)

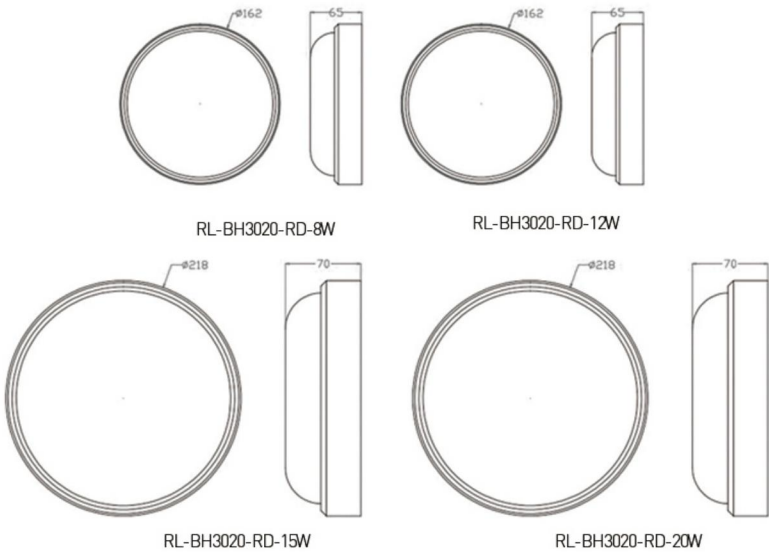

IP 54 rating ensure reliable operation
in demanding outdoor environments

Parameters

Model NO.	RL-BH3020-RD			
LED Consumption	8W+1.0W	12W+1.2W	15W+1.5W	20W+2W
System consumption	8W	12W	15W	20W
Input voltage	AC100-260V			
Power factor	>0.5			
Output current	240MA			
Luminous	800LM	1200LM	1500LM	2000LM
CRI	Ra>70/80			
Color temperature	2800-3000K/4000-4500K/6000~650			
Working temperature	-20			
Storage temperature	-30°C-55°C			
IP Grade	IP54			
Working life-span	50000 hours			
Beam angle	120°			
Color	BLACK/WHITE			
Warranty	5 YEARS			
DIM.OP	0-10V/1-10V/DALI			

Photometric diagrams

