

RL-LDL1410

LED surface Down light



0-10V/1-10V/
DALI



1 00Lm/W



warranty



85V - 265V



IP65



Dust proof



Mosquito-
proof



-30°C~+45°C



20° 40° 60°




50,000H




Easy
Installation



CCT
switchable

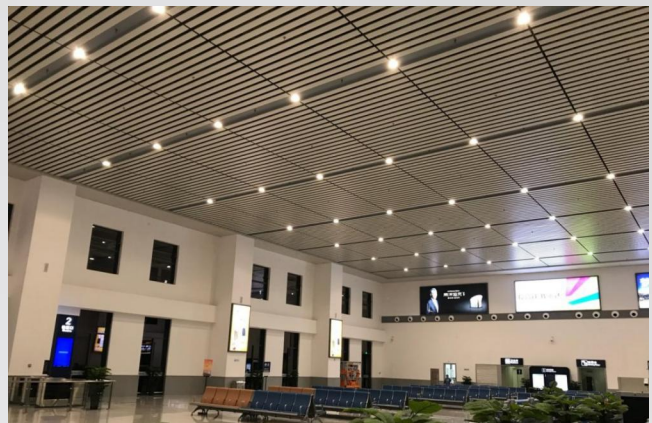

Size

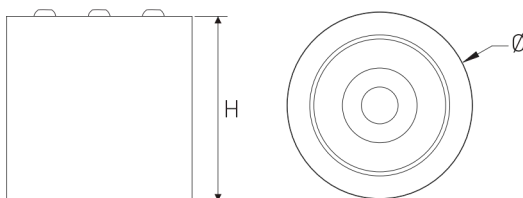

Parameters

Model NO.	RL-LDL1410			
Power	20W	30W	40W	50W
Size (MM)	Ø125xH115	Ø160xH110	Ø200xH110	Ø240xH110
Lumens	100LM/W			
COL. TEMP	3000K/4000K/6500K/CCT			
DIM. OP	0-10V/1-10V/ DALI			
Adjustable	NO			
Material	Aluminium / Clear PC			
Colour	Grey / White			
Beam Angle	20°40°60°			
Chip	COB			
CRI	> 90			
PF	0.95			
Driver	Included			
Voltage	85-265V			
IP Rating	IP65			
Life	50000 hours			
Warranty	5 Years			

Photometric diagrams

Beam Angle:40°

