

RL-DL1411 series

LED surface Downlight



0-10V/1 -10V/
DAL



1.00 Lm/W



warranty



100-240V



IP65



Dust proof



Mosquito-proof



-30°C~+45°C



20° 40° 60°




50,000H




Easy Installation



CCT
switchable

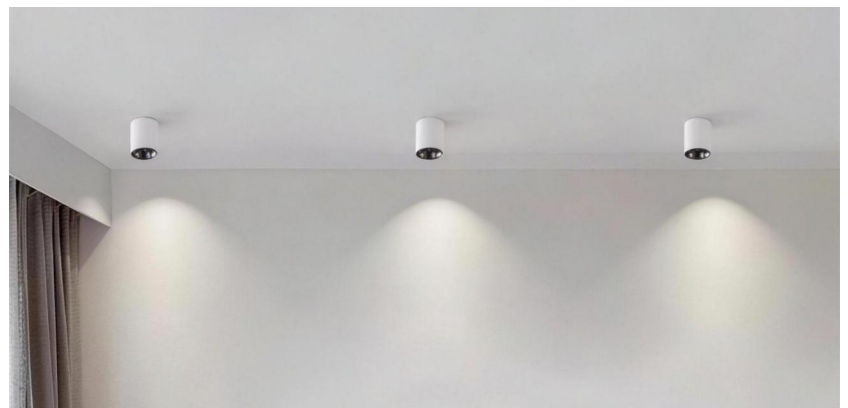


Size

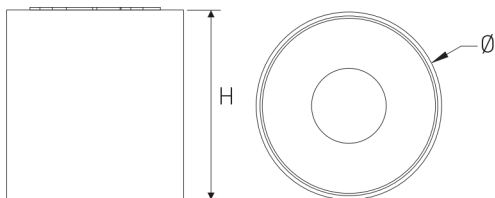

Photometric diagrams

Beam Angle:40°

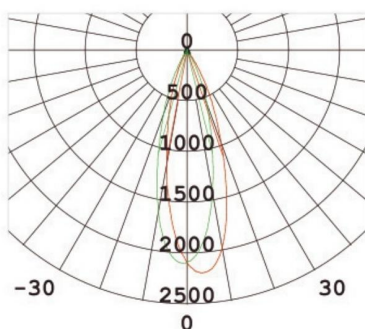

Parameters

Model NO.	RL-DL1411 series							
Power	10W	15W	15W	20W	30W	40-50W	50-60W	60-100W
Sizel MM)	Ø75xH100	Ø75xH152	Ø95xH100	Ø75xH152	Ø115xH152	Ø140xH160	Ø170xH182	Ø205xH212
Lumens	100LM/W							
COL.TEMP	3000K/4000K/6500K/CCT							
DIM.OP	0-10V/1-10V/ DALI							
Adjustable	NO							
Material	Aluminium / PC							
Colour	White/Black							
Beam Angle	20°40°60°							
Chip	COB							
CRI	> 90							
PF	0.5	0.5	0.95	0.95	0.95	0.95	0.95	0.95
Driver	Included							
Voltage	100-240V							
IP Rating	IP65							
Life	50000 hours							
Warranty	5 Years							