



## RL-DL1510

### LED Recessed Downlight



0-10v/1-10v/  
DALI



100Lm/W



warranty



100-240V



IP20



50,000H



Good Heat  
Dissipation




CCT  
switchable



▲ Black

▲ White

### Size

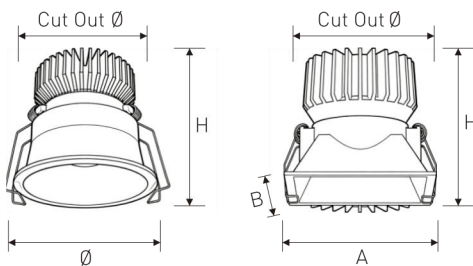


### Parameters

| Model NO.   | RL-DL1510             |              |         |         |
|-------------|-----------------------|--------------|---------|---------|
| Power       | 7W                    | 12W          | 12W     | 20W     |
| Size(MM)    | Ø 65* H70             | Ø 90*90* H70 | Ø 85*75 | Ø105*97 |
| Cut Out(mm) | Ø55                   | Ø75*75       | Ø75     | Ø95     |
| Beam Angle  | 15°24°36°             |              |         |         |
| Lumens      | 100LM/W               |              |         |         |
| COL.TEMP    | 3000K/4000K/6500K/CCT |              |         |         |
| DIM. OP     | 0-10V/1-10V/ DALI     |              |         |         |
| Adjustable  | NO                    |              |         |         |
| Material    | Aluminium /Glass      |              |         |         |
| Diffuser    | Glass                 |              |         |         |
| Colour      | White/ Black          |              |         |         |
| Chip        | COB                   |              |         |         |
| CRI         | > 90                  |              |         |         |
| PF          | 0.5                   | 0.5          | 0.5     | 0.9     |
| Driver      | Included              |              |         |         |
| Voltage     | 100-240V              |              |         |         |
| IP Rating   | Ip20                  |              |         |         |
| Life        | 50000 hours           |              |         |         |
| Warranty    | 5 Years               |              |         |         |

### Photometric diagrams

Beam Angle:24°

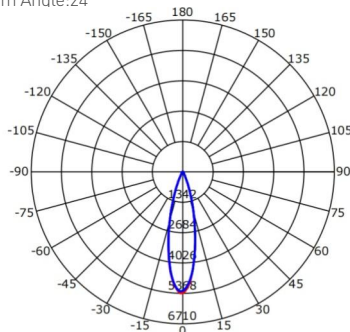

Beam Angle(50%) C0-180,C90-270: 25.0 deg,25.3 deg

C0-180 — C90-270 —