

RL-MINI LED02

Magnetic System Products



Easy Install High CRI Flicker Free Energy Efficient customization



Environmental Friendly 0/1-10V DALI 2 Warranty 0/1-10V/DALI DIMMING



5W



15W



8W



20W



12W



22W


CCT Compare Image




3000K 4000K 6000K

Photometric diagrams

Beam Angle:30°
Useful Lumens:785.78lm@10W




Luminaire effective average illumination diagram

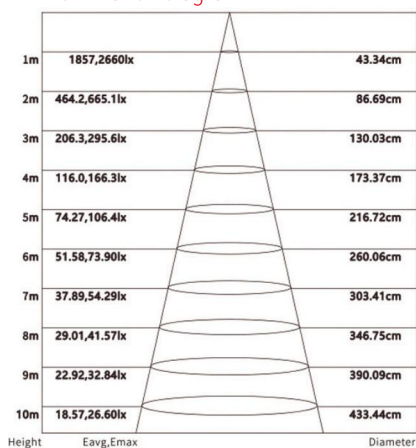


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.


Size




5W




8W




12W



15W



20W



22W

Parameters

Model NO.	RL-MINI LED02					
POWER	6W	8W	12W	15W	20W	22W
DIM.OP	0-10V/1-10V/DALI					
IP RATE	IP20					
SMART DIMMING	YES					
LIGHT SOURCE LUMENS	>100LM/W					
CCT	3000K/4000K/6000K/DIMMABLE& CCT ADJUSTABLE/CUSTOMIZED					
RA	>90/FULL SPECTRUM					
BEAM ANGLE	15°/30°/48°					
HOUSING COLOR	BLACK/HITE/CUSTOMIZED					
VOLTAGE	DC48V					
LIFETIME	50000 hours					
WARRANTY	5 YEARS					