


RL-MINI LED05

Magnetic System Products




CCT Compare Image

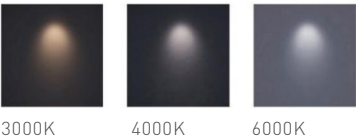


Photometric diagrams

Beam Angle:24°
Useful Lumens:770.342 lm@10W




Luminaire effective average illumination diagram

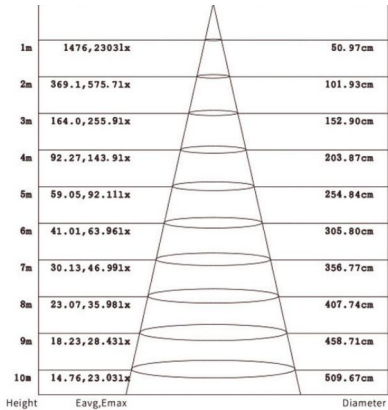

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

Size

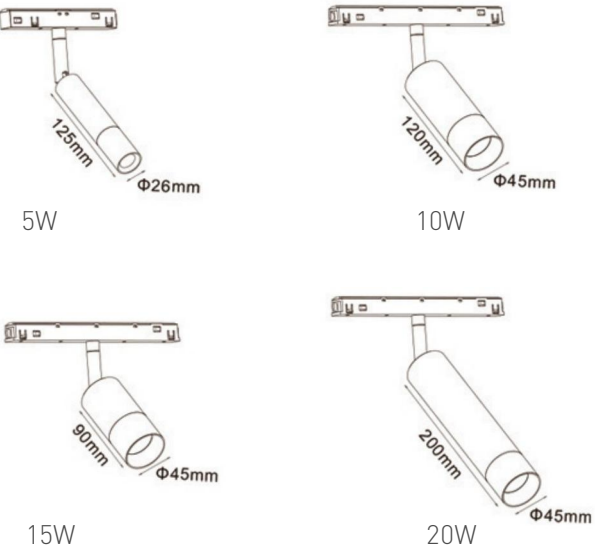

Parameters

Model NO.	RL-MINI LED05			
POWER	5W	10W	15W	20W
DIM.OP	0-10V/1-10V/DALI			
IP RATE	IP20			
SMART DIMMING	YES			
LIGHT SOURCE LUMENS	>100LM/W			
CCT	3000K/4000K/6000K/DIMMABLE& CCT ADJUSTABLE/CUSTOMIZED			
RA	>90/FULL SPECTRUM			
BEAM ANGLE	15°/24°/38°			
LIGHT SOURCE	OSRAM/CREE/BRIGELUX/LUMILEDS			
VOLTAGE	DC48V			
LIFETIME	50000 hours			
WARRANTY	5 YEARS			