

RL-MINI LED08

Magnetic System Products



5W*2



10W*2



15W*2




20W*2

CCT Compare Image




Size




5W*2



10W*2



15W*2




20W*2


Photometric diagrams

Beam Angle:24°

Useful Lumens:811.124 lm@5W*2



Luminaire effective average illumination diagram

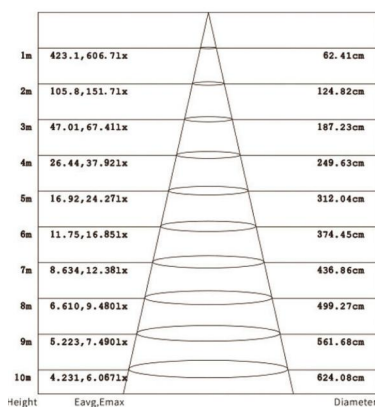

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

Parameters

Model NO.	RL-MINI LED08			
POWER	19W	20W	30W	40W
DIM.OP	0-10V/1-10V/DALI			
IP RATE	IP20			
SMART DIMMING	YES			
LIGHT SOURCE LUMENS	>100LM/W			
CCT	3000K/4000K/6000K/DIMMABLE& CCT ADJUSTABLE/CUSTOMIZED			
RA	>90/FULL SPECTRUM			
BEAM ANGLE	10°/15°/24°/38°			
LIGHT SOURCE	OSRAM/CREE/BRIGELUX/LUMILEDS			
VOLTAGE	DC48V			
LIFETIME	50000 hours			
WARRANTY	5 YEARS			