


RL-MINI LED09
Magnetic System Products




CCT Compare Image



Photometric diagrams


Beam Angle:24°
Useful Lumens:624.792lm@7W

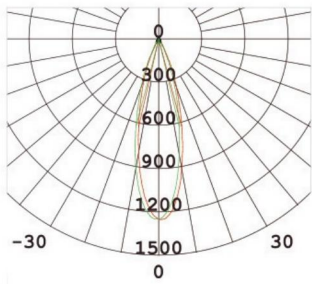

Size



Luminaire effective average
illumination diagram

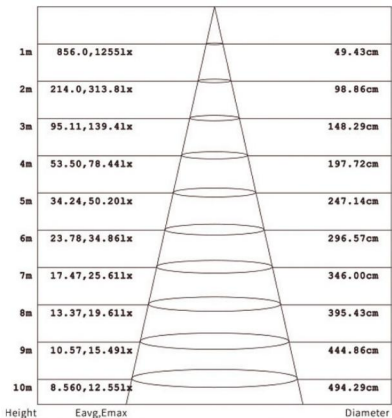

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

Parameters

Model NO.	RL-MINI LED09
POWER	7W
DIM.OP	0-10V/1-10V/DALI
IP RATE	IP20
SMART DIMMING	YES
LIGHT SOURCE LUMENS	>100LM/W
CCT	3000K/4000K/6000K/DIMMABLE& CCT ADJUSTABLE/CUSTOMIZED
RA	>90/FULL SPECTRUM
BEAM ANGLE	20°/40°/60°
LIGHT SOURCE	OSRAM/CREE/BRIGELUX/LUMILEDS
VOLTAGE	DC48V
LIFETIME	50000 hours
WARRANTY	5 YEARS