

# RL-MINI LED10

## Magnetic System Products



Easy Install   High CRI   Flicker Free   Energy Efficient   customization



Environmental Friendly   0/1-10V   DALI 2   Warranty   0/1-10V/DALI



5W




10W




15W

### CCT Compare Image

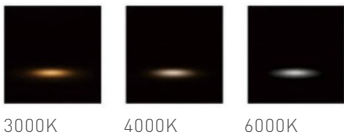


### Photometric diagrams


Beam Angle:40°  
Useful Lumens::698.676lm@7W

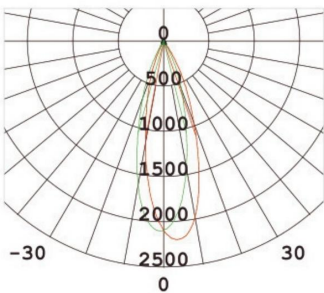


### Size



5W

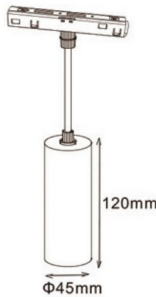


10W

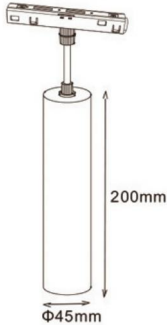

15W

### Luminaire effective average illumination diagram

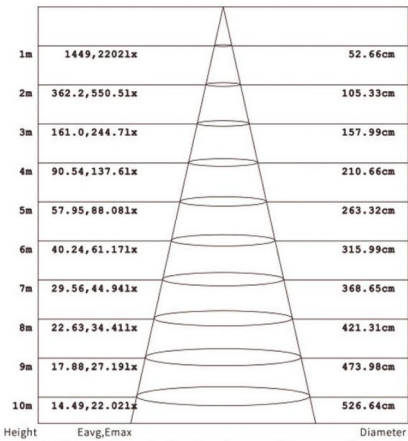

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

### Parameters

| Model NO.           | RL-MINI LED10                                         |     |     |
|---------------------|-------------------------------------------------------|-----|-----|
| POWER               | 5W                                                    | 10W | 15W |
| DIM.OP              | 0-10V/1-10V/DALI                                      |     |     |
| IP RATE             | IP20                                                  |     |     |
| SMART DIMMING       | YES                                                   |     |     |
| LIGHT SOURCE LUMENS | >100LM/W                                              |     |     |
| CCT                 | 3000K/4000K/6000K/DIMMABLE& CCT ADJUSTABLE/CUSTOMIZED |     |     |
| RA                  | >90/FULL SPECTRUM                                     |     |     |
| BEAM ANGLE          | 20°/40°/60°                                           |     |     |
| LIGHT SOURCE        | OSRAM/CREE/BRIGELUX/LUMILEDS                          |     |     |
| VOLTAGE             | DC48V                                                 |     |     |
| LIFETIME            | 50000 hours                                           |     |     |
| WARRANTY            | 5 YEARS                                               |     |     |