

RL-MINI LED23

Magnetic System Products



6W




12W




18W

CCT Compare Image




Photometric diagrams

Beam Angle:120°
Useful Lumens:358.88lm@6W




Luminaire effective average illumination diagram

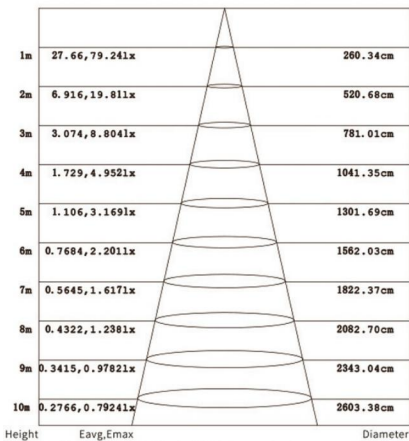


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.


Size



6W

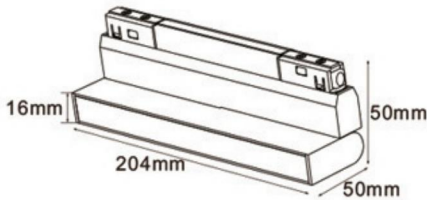

12W

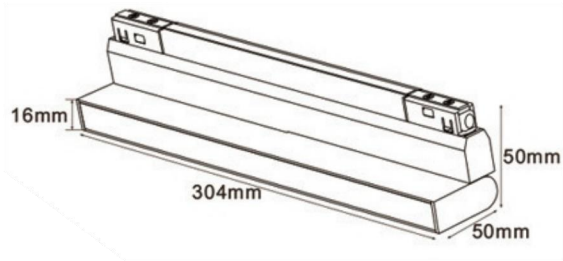

18W

Parameters

Model NO.	RL-MINI LED23		
POWER	6W	12W	18W
DIM.OP	0-10V/1-10V/DALI		
IP RATE	IP20		
SMART DIMMING	YES		
LIGHT SOURCE LUMENS	>100LM/W		
CCT	3000K/4000K/6000K/DIMMABLE& CCT ADJUSTABLE/CUSTOMIZED		
RA	>90/FULL SPECTRUM		
BEAM ANGLE	120°		
HOUSING COLOR	BLACK/HITE/CUSTOMIZED		
LIGHT SOURCE	OSRAM/CREE/BRIGELUX/LUMILEDS		
VOLTAGE	DC48V		
LIFETIME	50000 hours		
WARRANTY	5 YEARS		