

RL-MINI LED24

Magnetic System Products



Easy Install High CRI Flicker Free Energy Efficient customization



Environmental Friendly 0/1-10V DALI 2 Warranty 0/1-10V/DALI



6W



12W



18W


CCT Compare Image




3000K 4000K 6000K

Photometric diagrams


Beam Angle:30°
Useful Lumens:447.68lm@6W




Size



6W

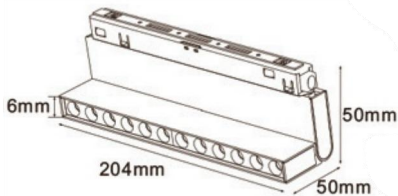


12W

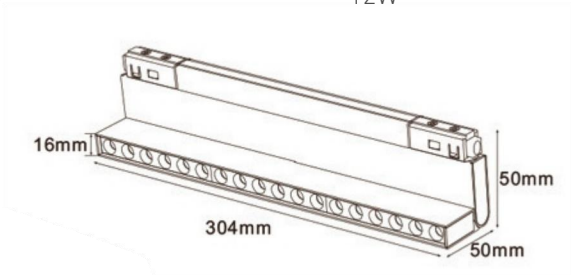

18W

Luminaire effective average illumination diagram

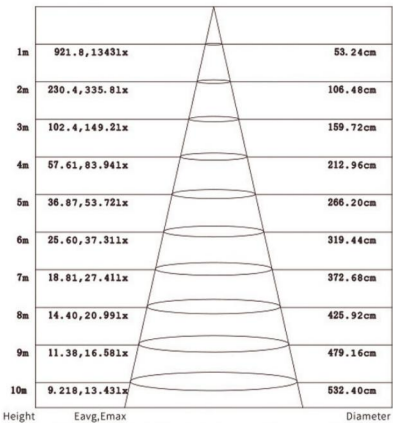

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

Parameters

Model NO.	RL-MINI LED24		
POWER	6W	12W	18W
DIM.OP	0-10V/1-10V/DALI		
IP RATE	IP20		
SMART DIMMING	YES		
LIGHT SOURCE LUMENS	>100LM/W		
CCT	3000K/4000K/6000K/DIMMABLE& CCT ADJUSTABLE/CUSTOMIZED		
RA	>90/FULL SPECTRUM		
BEAM ANGLE	15°/30°/48°		
HOUSING COLOR	BLACK/HITE/CUSTOMIZED		
VOLTAGE	DC48V		
LIFETIME	50000 hours		
WARRANTY	5 YEARS		