

RL-PNL2663-SERIES

ultra-thin Large screen
LED surface-mounted panel Light



0-10V/1-10V/
DALI



120LM/W



warranty



100-240V



IP20/IP44/IP65



Dustproof



mosquito-
proof



-30°C~+45°C



120°




50,000H



Easy
Installation




CCT
switchable

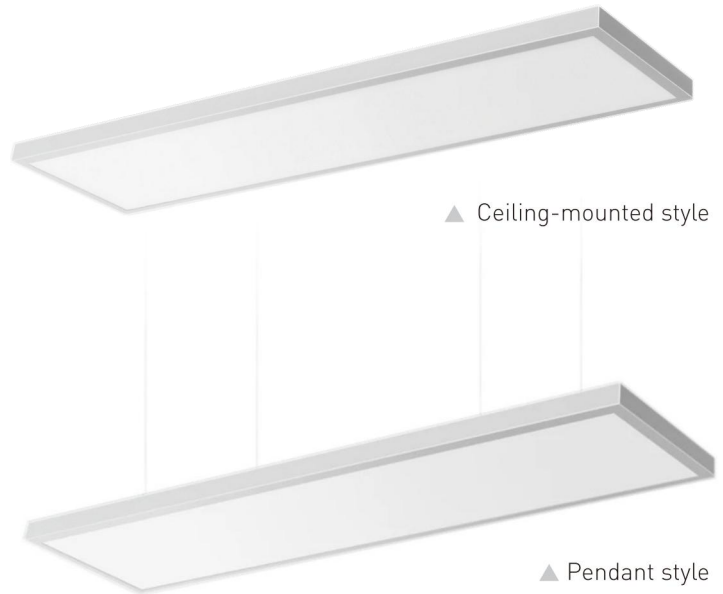


▲ Ceiling-mounted style


▲ Pendant style

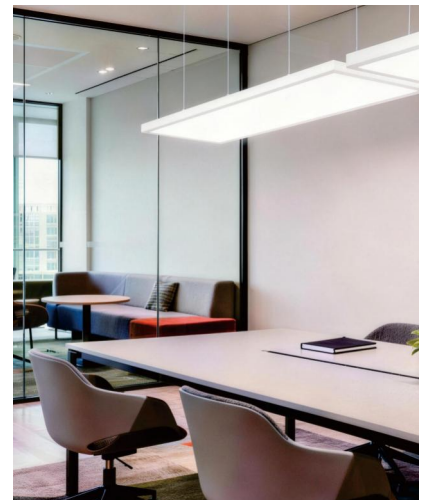

Size(mm)




RL-PNL2663-SM-SERIES

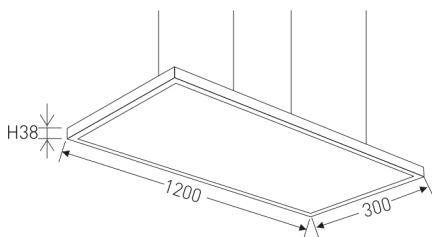

RL-PNL2663-PN-SERIES

Photometric diagrams

Beam Angle:120°

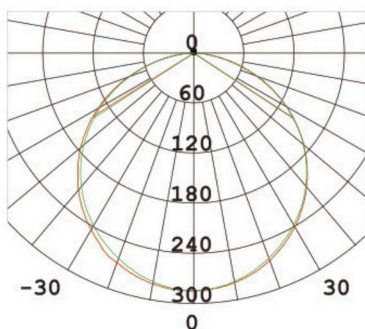

Parameters

Model NO.	RL-PNL2663-SM-SERIES	RL-PNL2663-PN-SERIES
Size(MM)	1200*300* H38	
Power	40W/48W/60W	
Lumens	120LM/W	
COL. TEMP	3000K/4000K/6500K/CCT	
DIM. OP	0-10V/1-10V/ DALI	
Adjustable	NO	
Material	Aluminium/ PS	
Colour	White	
Beam Angle	120°	
Chip	SMD	
CRI	> 90	
PF	0.9	
Driver	Included	
Voltage	100-240V	
IP Rating	IP20/IP44/IP65	
Life	50000 hours	
Warranty	5 Years	