

RL-SPL2231-RD

RL-SPL2231-SQ

Recessed Spot Light



0-10v/1-10v/
DALI



100LM/W



warranty



85 - 265V



IP20/44



50,000H




Efficient heat
dissipation




Easy
installation





RL-SPL2231-RD

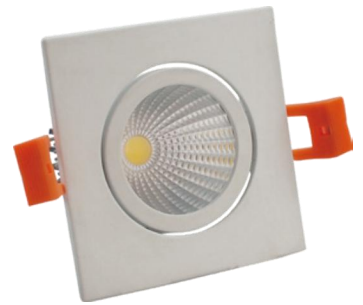

RL-SPL2231-RD

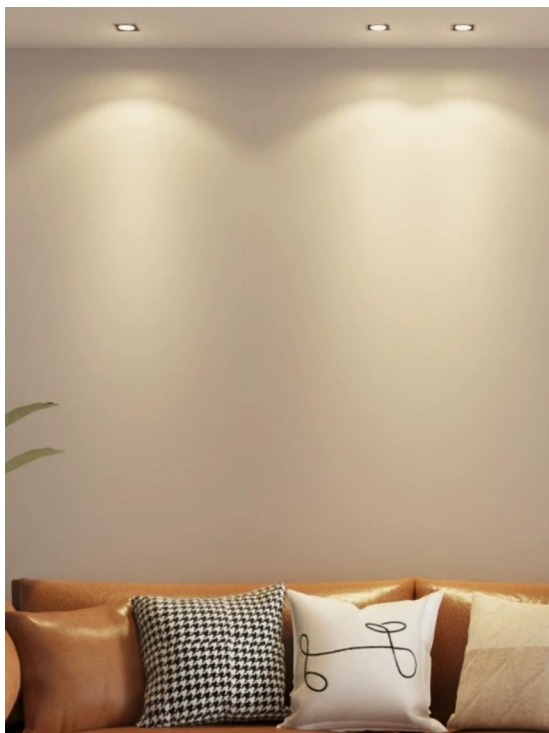

Size

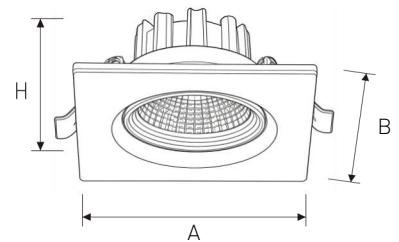

Parameters

Model NO.	RL-SPL2231-RD			RL-SPL2231-SQ		
Power	9W	12W	15W	9W	12W	15W
Beam	15°24°36°					
ADJUSTABLE	YES					
DIM. OP	0-10V/1-10V/ DALI					
COL. TEMP	3000K/4000K/6500K/CCT					
SIZE(MM)	Ø 90*H65	Ø 110*H75	Ø 138*H95	90*90*H65	110* 110*H75	138* 138H95
Cut out(MM)	Ø 75	Ø 95	Ø 120	Ø 75	Ø 95	Ø 120
LUMENS	100LM/W					
HOUSING	ALUMINIUM /ACRYLIC					
COLOUR	White/Black					
LED chip	COB					
CRI	> 80					
PF	0.5					
DRIVER	INCLUDED					
VOLTAGE	85-265V					
IP RATING	IP20/44					
LIFE	50,000 hours					
Warranty	3/5 YEARS					

Photometric diagrams

