

RL-SR2047-SERIES


Led Street Light



Angle adjustable




Dimensions

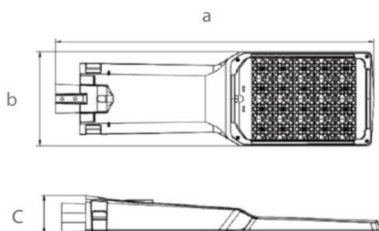


Parameters

Model NO.	RL-SR2047-1		RL-SR2047-2		RL-SR2047-4		RL-SR2047-6	
Power	40W	60W	80W	100W	150W	180W	240W	300W
Lumen	5600Lm	8400Lm	11200Lm	14000Lm	21000Lm	25200Lm	33600Lm	42000Lm
Size(a*b*c)	514*210*111		578*235*95		770*235*95		895*340*104	
LUMENS	140LM/W							
CCT(TyP. K+10%)	3000K,4000K,5700K							
DIM.OP	0-10V/1-10V/ DALI							
CRI(Ra)	≥70							
SDCM	≤6							
Beam angle	Type II , Type III							
Input voltage	AC 100-240V/220-240V50-60Hz							
Power Factor	> 0.95							
Surge Protection	MOSO:L-N: 5KV, INVENTRONICS:L-N: 6KV							
Dimmable	0-10V, PWM, Timer dimming(Optional)							
Housing	High-pressure die-cast aluminum RAL9023 gray							
Lens	UV-resistant polycarbonate							
Cover	Tempered glass							
LED Drive	MOSO(100-240V)INVENTRONICS (220-240V)							
LED Brand/Model	EDISON 5050							
Mounting	Side entry or post-top							
Operating Temperature	-20~+50°C							
Storage humidity	10%~85%							
Protection	IP66, IK09							
Electrical class	Class							
Safety Approval	CB, CE, ENEC							
Lumen maintenance	50,000 hours at L7							
Warranty	5 Years							

Light Distribution Curve



Type II



Type III