


RL-SR2048-SERIES

Led Street Light



Large lamp
656*260*84mm

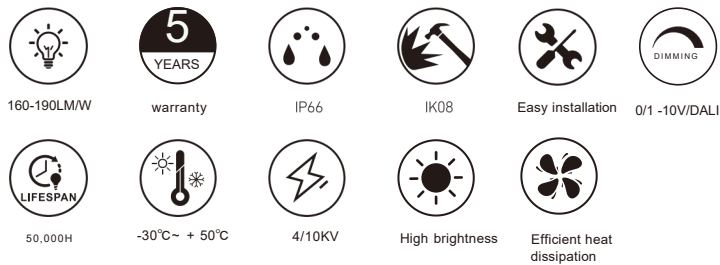

Medium lamp
594*240*84mm









small lamp
506*200*79mm



DUSK TO DAWN
PHOTOCELL SENSOR

Photometric diagrams

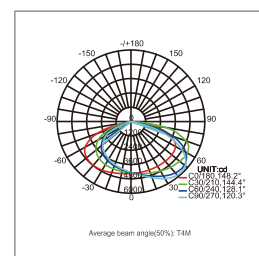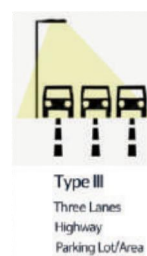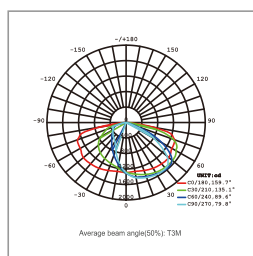

Outdoor Protection



Parameters

Model NO.	RL-SR2048-SERIES		
Power(w)	30/40/50/60	70/80/90/100/110/120	130/140/150/160/170/180/190/200
LED Type	Lumileds/Sanan		
Efficiency	160Lm/W-190Lm/W		
Luminous Flux	5700LM-9600LM	13,300LM-19,200LM	24,700LM-32,000LM
CCT	3000K/4000K/5000K/5700K/6500K		
DIM.OP	0-10V/1-10V/ DALI		
Beam Angle	T2/T3/T4		
CRI	> 70Ra		
Power Supply	Meanwell/Sosen/nventronics		
Input Voltage	AC 100-277V/220-240V		
Power Frequency	50/60Hz		
Power Factor	0.95		
Total Harmonic Distortion	< 15%		
IP Rating	IP66		
SPD	Built-in 4 KV, 10KV external SPD optional		
Lifetime(L70 Standard)	50,000 hours		
Heat Radiator	Die-cast aluminum		
Lens Material	Glass		
Warranty	5 Years		