



RL-UPDN-05-SERIES

HIGH-EFFICIENCY
LED OUTDOOR WALL LIGHTS
SOLUTION



Sealing
design



80Lm/W



Warranty



IP65



IK08



0/1-10V/DALI



100-240V



50,000H



-20°C~+45°C




Easy
Installation



Efficient heat
dissipation

Size

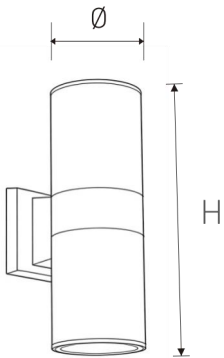

Parameters

Model NO.	RL-UPDN-05-SERIES		
POWER	5W*2	10W*2	20W*2
BEAM ANGLE	24°		
LUMENS	100LM		
COL.TEMP	3000K/4000K/6500K		
DIM.OP	0-10V/DALI		
ADJUSTABLE	NO		
SIZE(MM)	Ø 65*H160	Ø90*H260	Ø110*H300
HOUSING	ALUMINIUM+GLASS		
REFLECTOR	GLASS		
DIFFUSER	GLASS		
COLOUR	BLACK/WHITE		
CHIP	COB		
CRI	> 90		
PF	0.5		
DRIVER	INCLUDED		
VOLTAGE	100-240V		
LIFE	50000 hours		
WARRANTY	5 years		
IP RATING	IP65		

Applications

The main use of landscape community, gatepost, patio, villa garden.

