


LED CEILING LIGHT



Chandelier-style



Ceiling-mounted



White

Black

RL-SD6015-SERIES LED Ceiling Light

BACKLITE technology ensures high efficiency and even, lasting light without yellowing.
Offers flexible surface or suspended mounting.
Ideal for offices, hotels, schools, and retail spaces.



DIMMING



100lm/W



Warranty



220-240V



IP44



Dustproof



mosquito-proof



-30°C~+45°C



120°



50,000H




Easy Installation



CCT switchable

Size

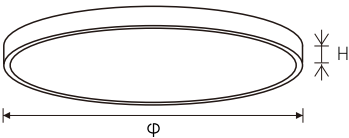

Parameters


Model No.	RL-SD6015-SERIES			
Power	30W	36W	48W	80W
Size (MM)	Ø400*H70	Ø500*H70	Ø600*H70	Ø800*H70
LED qty	72	90	120	160
Lumens	80-90LM/W			
MOQ	500			
COL. TEMP	3000K/4000K/6500K/CCT			
DIM. OP	0-10V/1-10V/DALI			
Material	Metal/ PC			
Chip	SMD			
CRI	>80			
PF	0.9			
Driver	Included			
Voltage	220-240V			
Hz	50-60Hz			
IP Rating	IP44			
Life	50000 hours			
Warranty	5 Years			



Colour



Size

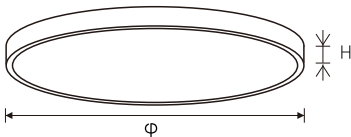

RL-CLRD-SM-SERIES
LED Panel Light

A sleek, circular light designed for ceiling or pendant use.
Available in White, Black, and Gold.
Features moisture, dust, and insect resistance.
Minimalist and versatile for any space.



Chandelier-style



Ceiling-mounted

DIMMING
0-10V/1-10V/
DALI

100Lm/W

5
YEARS
Warranty

220-240V

IP44

Dustproof

mosquito-
proof

-30°C~+45°C

120°

LIFESPAN
50,000H

Easy
Installation

CCT
switchable

Parameters

Model#	RL-CLRD-SM-SERIES
Adjustability	NA
Beam angle	120 °
CCT	3000K/4000K/6000K DIP switch control
Chromaticity Tolerance	3
Color housing	White (RAL 9003)
Connected Load	18W /24W /32W/40W/ 50W/ 60W
CRI	(RA) > 80
Emergency	No
Size(MM)	φ230x25/ φ300x25/ φ400x25/ φ500x25/ φ600x25/ φ750x25mm
Ingress Protection	IP44
Installation Method	Surface mounted/ Suspended
Lifetime/Failure rate	>100000h/L80B20 / >50000h/L90B50
Lumen/p.watt	100Lm/W
Luminaire Body	Plastic PS
Luminous Flux	1800lm/ 2400lm/ 3200lm/ 4000lm/ 5000lm/ 6000lm
MainsVoltage	220-240V / 50-60Hz
Max. ambient temperature	-20~+45 °C
Net. Weight	1.05 Kg
Optic	PS diffuser
Warranty	3 years
Driver	PF→0.9 flicker free
Electrical Safety Class	ClassII
Light source energy class	E
LED CHIP	SMD2835
DIM. OP	0-10V/1-10V/DALI



RL-PNT-SERIES
LED Ceiling Light

A sleek, circular light designed for ceiling use.
Available in White, and Black.
Features moisture, dust, and insect resistance.
Minimalist and versatile for any space.

- 

DIMMING

0-10V/1-10V/
DALI
- 

100Lm/W
- 

5
YEARS
Warranty
- 

100-240V
- 

IP44
- 

Dustproof
- 

mosquito-
proof
- 

-30°C~+45°C
- 

120°
- 


50,000H
- 

Easy
Installation
- 

CCT
switchable



Size

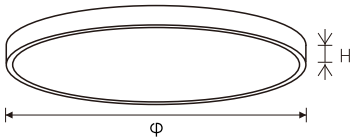

Parameters

Model No.	RL-PNT-SERIES				
Power	24-30W	40-50W	70-80W	80-90W	100-120W
Size (MM)	Ø400*H50	Ø600*H50	Ø800*H50	Ø1000*H50	Ø1200*H50
Lumens	100LM/W				
COL. TEMP	3000K/4000K/6500K/CCT				
DIM. OP	0-10V/1-10V/DALI				
Adjustable	NO				
Material	Metal/ PC				
Colour	White/Black				
Chip	SMD				
CRI	>80				
PF	0.9				
Driver	Included				
Voltage	100-240V				
IP Rating	IP44				
Life	50000 hours				
Warranty	5 Years				



RL-SD6017-RD
RL-SD6017-SQ

Ip54 Ceiling Light

IP65 Ceiling Light is a super slim and functional form ceiling light , it is with dimmable, CCT changeable , microwave sensor, emergency etc functions. It's ideal luminaire to any indoor applications.

0-10V/1-10V/
DALI

110Lm/W

Warranty

185-265V

IP54

Dustproof

mosquito-
proof

-30°C~+45°C

120°

50,000H

Easy
Installation

CCT
switchable



Optional Remote Controller

CCT Changeable

Power Changeable

ON/OFF CCT Changeable

ON/OFF Dimmable

Dimmable

RGB

WIFI + Bluetooth

Bluetooth Mesh

Emergency

Microwave Sensor



Size



Parameters

Model No.	RL-SD6017-RD			RL-SD6017-SQ		
Power	18W	24W	30W	18W	24W	30W
Size (MM)	Ø220*H51	Ø280*H51	Ø330*H51	220*220*H51	280*280*H51	330*330*H51
PF	≥0.8	≥0.8	≥0.9	≥0.8	≥0.8	≥0.9
Lumens	110LM/W					
COL. TEMP	3000K/4000K/6500K/CCT					
Material	PC					
Colour	White/Black					
Beam angle	120°					
CRI	80					
Energy Class	E					
Voltage	185-265V					
IP	IP54					
DIM. OP	0-10V/1-10V/DALI					