



LED GARDEN LIGHT

RL-BL3286-SERIES

For outdoor installation, Made of high-quality aluminum with treatmentof anti-corrosion and UV-proof powder coating.



90LM/W



Warranty



IP65



IK10



Easy installation



0/1-10V/DALI



50,000H



-20°C~ + 50°C



4/10KV




High brightness



Efficient heat dissipation



Dimensions

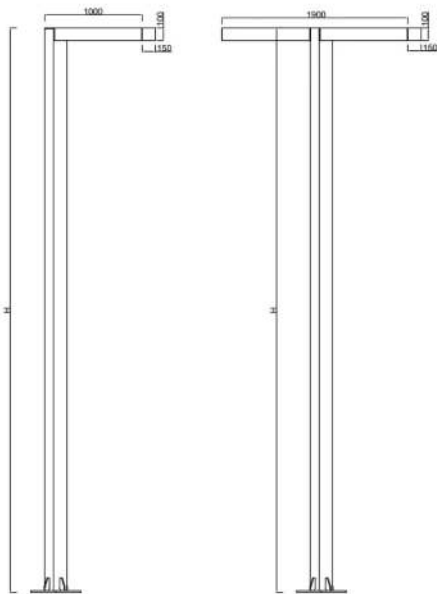

Single head

Double headed

Applications

The main use of landscape lighting, park, villa courtyard,



Outdoor Protection

IP65 and IK08 ratings ensure reliable operation in demanding outdoor environments. It can also be used normally in extremely cold or high temperature environment



Parameters

Model number	RL-BL3286			
Power	10-15W	30W	50W	50W*2
Material	Aluminum+glass			
Beam angle	60° 120°			
LUMENS	90LM/W			
Color temperature	3000K/4000K/5700K			
DIM.OP	0-10V/1-10V/DALI			
Size	W200H600mm	W700H2000mm	W700H3000/H3500mm	W1500H3500mm
CHIP	SMD			
COLOR	GREY/BLACK/CUSTOMIZABLE			
CRI	>80			
PF	0.95			
DRIVER	INCLUDED			
VOLTAGE	100-240V			
IP Rating	IP65			
LIFE	50000 hours			
Warranty	5 Years			

RL-BL3287-SERIES

For outdoor installation, Made of high-quality aluminum with treatmentof anti-corrosion and UV-proof powder coating.



80LM/W



Warranty



IP65



IK10



Easy installation



0/1-10V/DALI



50,000H



-20°C~ + 50°C



4/10KV



High brightness



Efficient heat dissipation



Applications

Suitable for outdoor lighting, courtyard, villa, trail, park



Outdoor Protection

IP65 and IK08 ratings ensure reliable operation in demanding outdoor environments. It can also be used normally in extremely cold or high temperature environment



Aluminum lamp body PC lampshade

Strong and durable, with excellent heat dissipation performance

Optical lens + Bridgelux chip



Parameters

Model number	RL-BL3287
Power	5W
Material	Aluminum+PC
Beam angle	120°
LUMENS	80LM/W
Color temperature	3000K/4000K/6500K
DIM. OP	0-10V/1-10V/DALI
ADJUSTABLE	YES
CHIP	SMD
COLOR	WHITE/BLACK
CRI	>80
PF	0.5
DRIVER	INCLUDED
VOLTAGE	100-240V
IP Rating	IP65
LIFE	50000 hours
Warranty	5 Years
Color	BLACK/WHITE/GRAY/SLIVER/GLOD/CUSTOMIZABLE

RL-BL3288-SERIES

For outdoor installation, Made of high-quality aluminum with treatment of anti-corrosion and UV-proof powder coating.



100LM/W



Warranty



IP65



IK10



Easy installation



0/1-10V/DALI



50,000H



-20°C~ +50°C



4/10KV



High brightness



Efficient heat dissipation











Applications

Suitable for outdoor lighting, courtyard, villa, trail, park



Outdoor Protection

IP65 and IK08 ratings ensure reliable operation in demanding outdoor environments. It can also be used normally in extremely cold or high temperature environment



Luminous effect

Extensive irradiation range



Aluminum lamp body

Strong and durable, with excellent heat dissipation performance



Acrylic lampshade

Optical lens + Bridgelux chip



Adjustable support bracket



Parameters

Model number	RL-BL3288	
Power	5W	5W*2
Size	155*120*H800mm	250*120*H800mm
Material	Aluminum+=Glass	
Beam angle	24° 38°	
LUMENS	100LM/W	
Color temperature	3000K/4000K/6500K	
DIM. OP	0-10V/1-10V/DALI	
ADJUSTABLE	YES	
CHIP	COB	
COLOR	WHITE/BLACK	
CRI	>90	
PF	0.5	
DRIVER	INCLUDED	
VOLTAGE	100-240V	
IP Rating	IP65	
LIFE	50000 hours	
Warranty	5 Years	
Color	BLACK/WHITE/GRAY/SLIVER/GLOD/CUSTOMIZABLE	

RL-BL3289-SERIES

RL-BL3290-SERIES



100LM/W



3 YEARS
Warranty



IP54



IK10



Easy installation



0/1-10V/DALI



30,000H



-20°C~ + 50°C



4/10KV



High brightness



Efficient heat dissipation











Aluminum lamp body

Strong and durable, with excellent heat dissipation performance



Outdoor waterproof

Waterproof lamp body



Acrylic lampshade

High light transmittance



Parameters

Model number	RL-BL3289A/B	RL-BL3290
Power	5W-15W	3W
Material	Aluminum+acrylic	
COL. TEMP	3000K/4000K/6500K	
DIM.OP	0-10V/1-10V/DALI	
Size(mm)	D108*H400/H600/H800	D60*H820/H1020/H1220
Colour	GREY/BLACK/WOODEN/CUSTOMIZABLE	
CRI	>80	
PF	0.5	
DRIVER	INCLUDED	
VOLTAGE	100-240V	24DC
IP Rating	IP54	
LIFE	30000 hours	
Warranty	3 years	

Applications

The main use of landscape lighting, park, villa courtyard,



RL-BL3291/3292



100LM/W



5 YEARS
Warranty



IP65



IK10



Easy installation



0/1-10V/DALI



50,000H



-20°C~ + 50°C



4/10KV



High brightness



Efficient heat dissipation











RL-BL3291

RL-BL3292

Aluminum lamp body

Strong and durable, with excellent heat dissipation performance



Outdoor waterproof

Waterproof lamp body



Parameters

Model number	RL-BL3291	RL-BL3292
Power	8W	10W
Material	Aluminum+glass	
COL. TEMP	3000K/4000K/6000K	
DIM.OP	0-10V/1-10V/DALI	
Size(mm)	L126*H600	L180*H750
Colour	GREY/BLACK/WOODEN/CUSTOMIZABLE	
CRI	>80	
PF	0.5	
DRIVER	INCLUDED	
VOLTAGE	100-240V	
IP Rating	IP65	
LIFE	50000 hours	
Warranty	5 years	

Applications

The main use of landscape lighting, park, villa courtyard,



RL-BL3293/3294/3295



100LM/W



Warranty



IP65



IK10



Easy installation



0/1-10V/DALI



50,000H



-20°C~ + 50°C



4/10KV



High brightness



Efficient heat dissipation





Aluminum lamp body

Strong and durable, with excellent heat dissipation performance



Outdoor waterproof

Waterproof lamp body



Applications

The main use of landscape lighting, park, villa courtyard,



Parameters

Model number	RL-BL3293	RL-BL3294	RL-BL3295
Power	10-15W	10-15W	10-15W
Material	Aluminum+glass		
COL. TEMP	3000K/4000K/6500K		
DIM.OP	0-10V/1-10V/DALI		
Size(mm)	D150H800	D160H800	D150H800
Colour	GREY/BLACK/WOODEN/CUSTOMIZABLE		
CRI	>80		
PF	0.9		
DRIVER	INCLUDED		
VOLTAGE	100-240V		
IP Rating	IP65		
LIFE	50,000 hours		
Warranty	5 years		

RL-BL3296/3297



100LM/W



Warranty



IP65



IK10



Easy installation



0/1-10V/DALI



50,000H



-20°C~ + 50°C



4/10KV




High brightness



Efficient heat dissipation



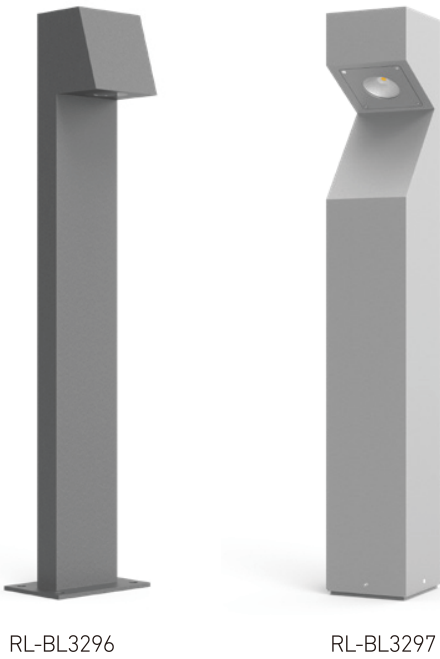

Aluminum lamp body

Strong and durable, with excellent heat dissipation performance



Outdoor waterproof

Waterproof lamp body



Applications

The main use of landscape lighting, park, villa courtyard,



Parameters

Model number	RL-BL3296	RL-BL3297
Power	10W	5-12W
Material	Aluminum+acrylic	
COL. TEMP	3000K/4000K/6500K	
DIM.OP	0-10V/1-10V/DALI	
Size(mm)	L105*H700	L150*H800
Colour	GREY/BLACK/WOODEN/CUSTOMIZABLE	
CRI	>80	
PF	0.9	
DRIVER	INCLUDED	
VOLTAGE	100-240V	
IP Rating	IP65	
LIFE	50,000 hours	
Warranty	5 years	

RL-BL3298-SERIES



100LM/W



Warranty



IP65



IK10



Easy installation



0/1-10V/DALI



50,000H



-20°C~ + 50°C



4/10KV



High brightness



Efficient heat dissipation









Aluminum lamp body

Strong and durable, with excellent heat dissipation performance



Outdoor waterproof

Waterproof lamp body



E27 Light source interface

Easy to change the light source



Applications

The main use of landscape lighting, park, villa courtyard,



Parameters

Power	E27 TYPE
Material	Aluminum+acrylic
COL. TEMP	3000K/4000K/6500K
Size(mm)	D108*H400/H600/H800
DIM.OP	0-10V/1-10V/DALI
Colour	GREY/BLACK/WOODEN/CUSTOMIZABLE
IP Rating	IP65
LIFE	50000 hours
Warranty	5 years

RL-BL3299-15W



100LM/W



Warranty



IP65



IK10



Easy installation



0/1-10V/DALI



50,000H



-20°C~ + 50°C



4/10KV



High brightness



Efficient heat dissipation









Aluminum lamp body

Strong and durable, with excellent heat dissipation performance



Outdoor waterproof

Waterproof lamp body



Applications

The main use of landscape lighting, park, villa courtyard,



Parameters

Power	15W
Material	Aluminum+glass
COL. TEMP	3000K/4000K/6500K
Size(mm)	D210*H205
Colour	GREY/BLACK/CUSTOMIZABLE
DIM.OP	0-10V/1-10V/DALI
Chip	COB
CRI	>80
PF	0.5
DRIVER	INCLUDED
VOLTAGE	100-240V
IP Rating	IP54
LIFE	50000 hours
Warranty	5 years