


LED GARDEN LIGHT

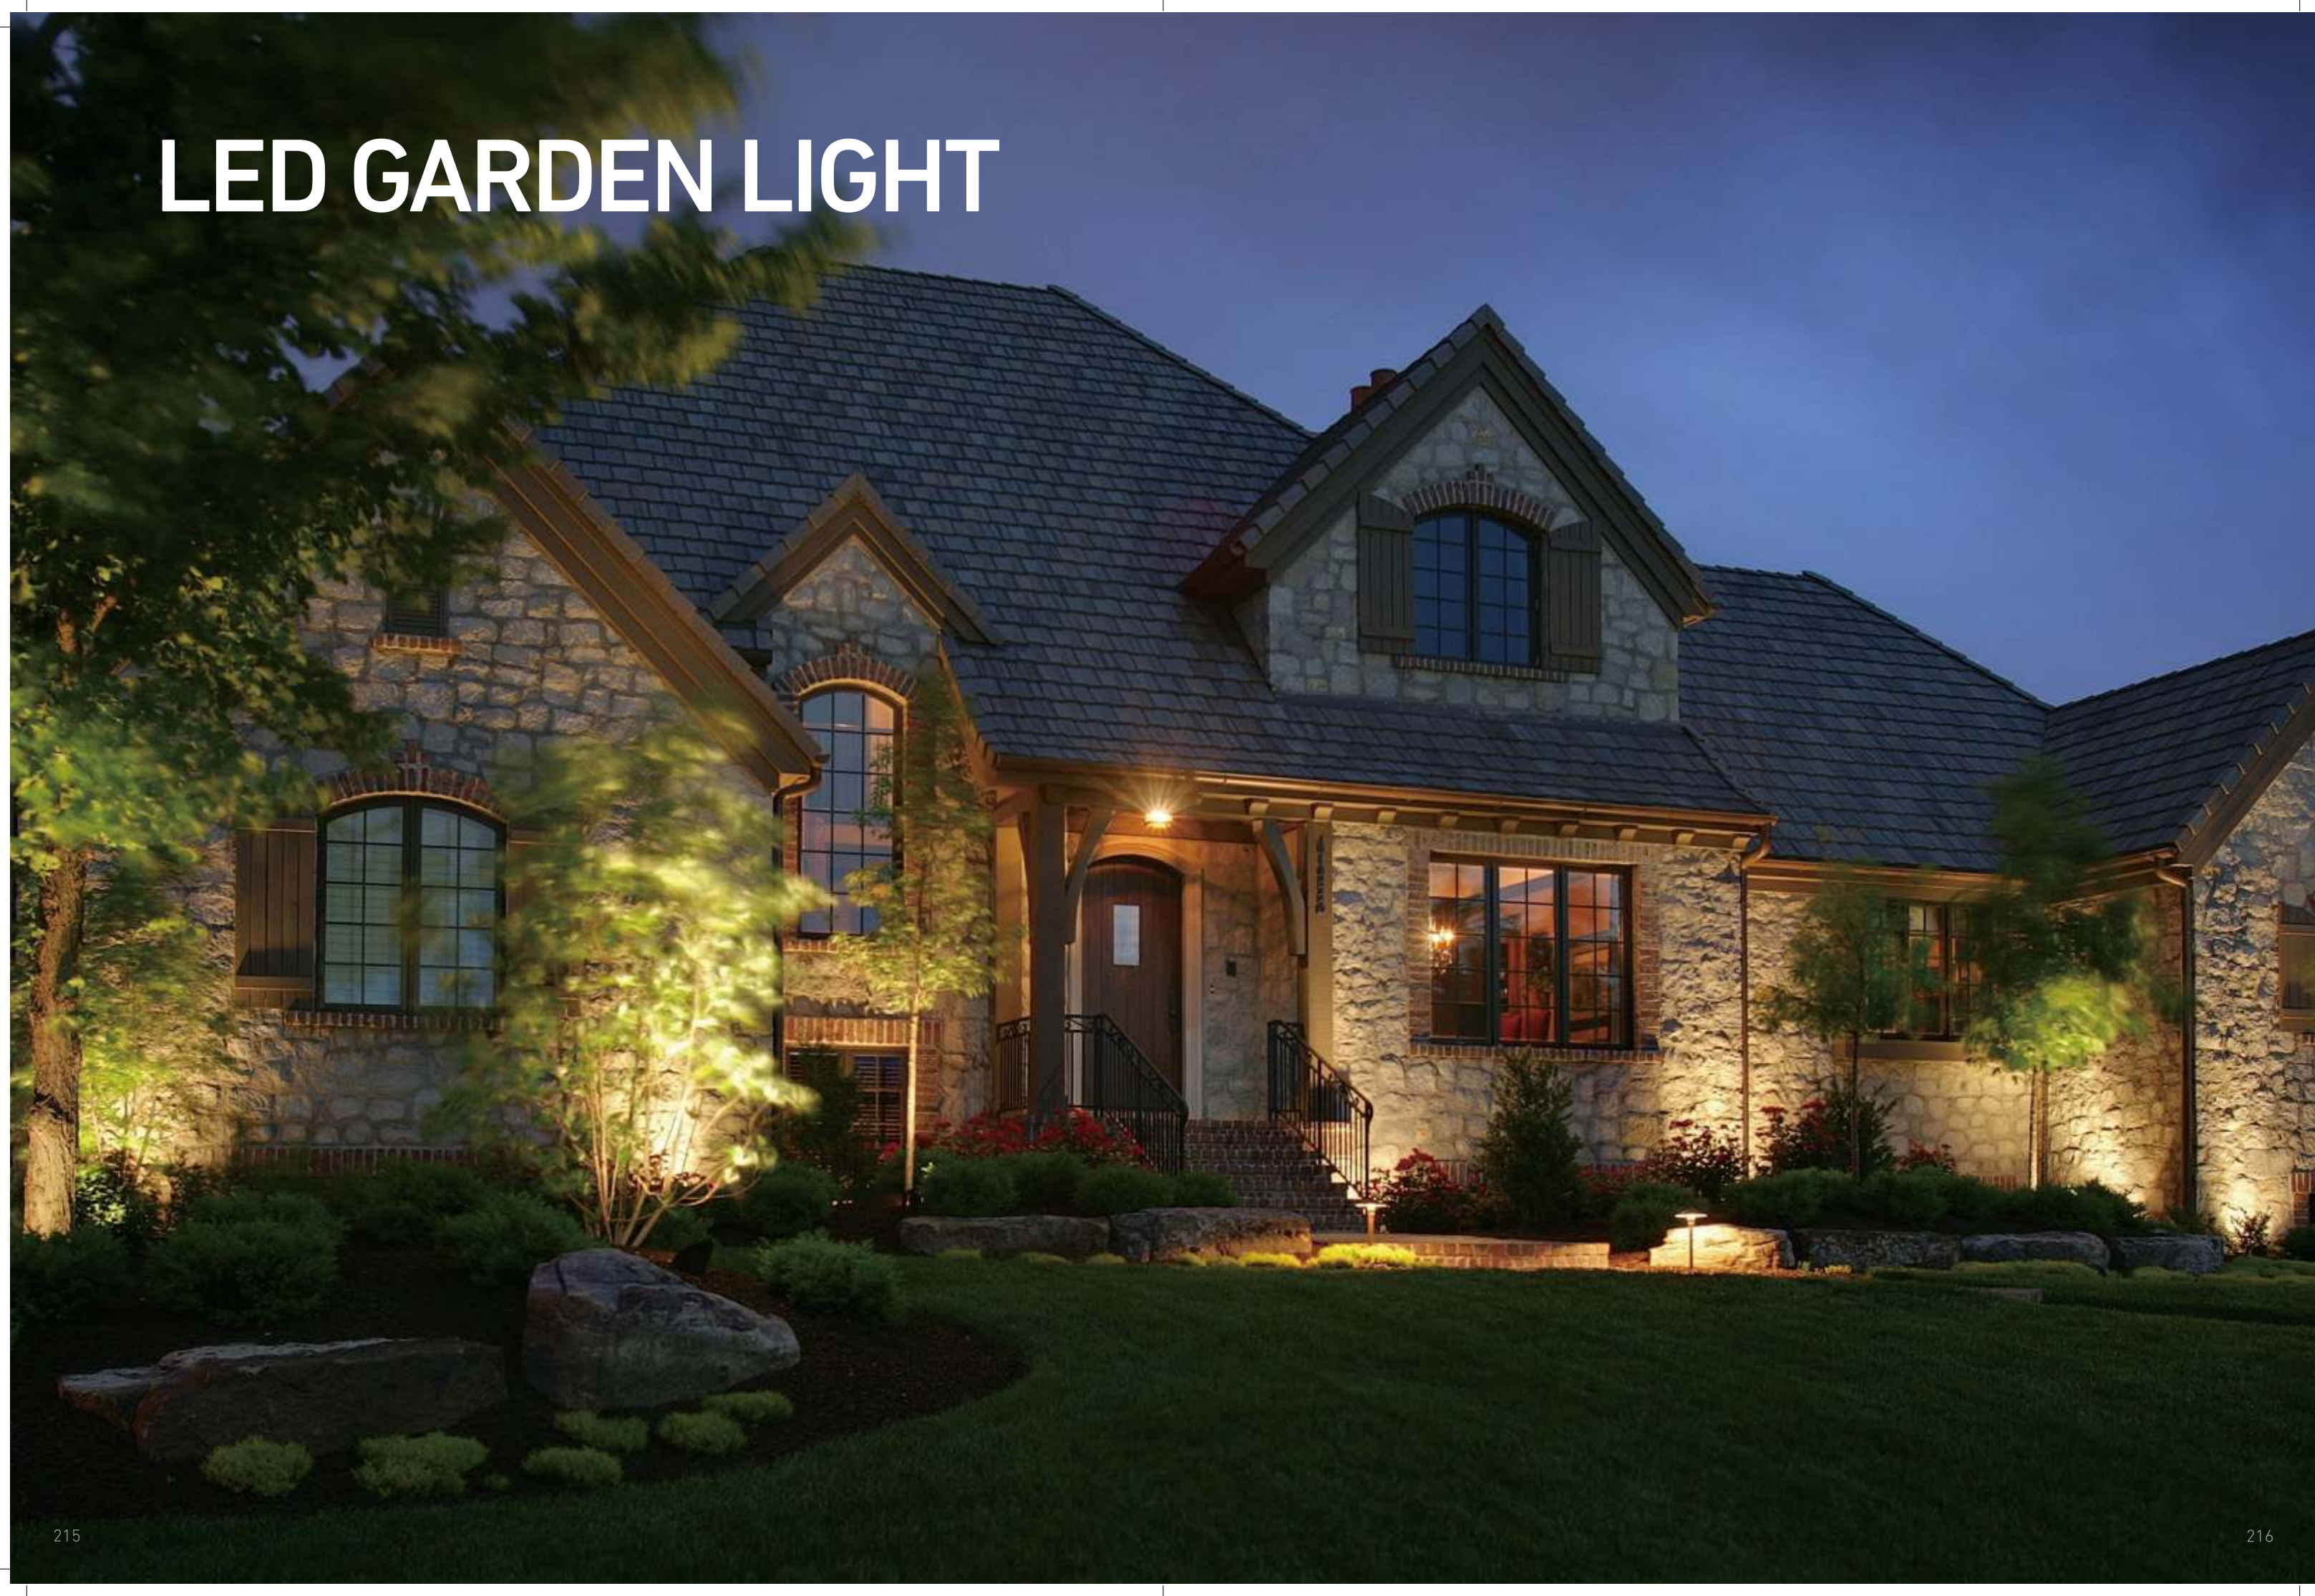

RL-FL5222-SERIES

HIGH-EFFICIENCY OUTDOOR LAWN LIGHTS SOLUTION

For outdoor installation, Made of high-quality aluminum with treatment of anti-corrosion and UV-proof powder coating. Glass difuser.

- 
110-120LM/W
- 
Warranty
- 
IP65
- 
IK08
- 
Easy installation
- 
0/1-10V/DALI
- 
50,000H
- 
-20°C~ + 50°C
- 
4/10KV
- 
High brightness
- 
Efficient heat dissipation






Outdoor Protection

IP65 and IK08 ratings ensure reliable operation in demanding outdoor environments
It can also be used normally in extremely cold or high temperature environment




Applications

The main use of landscape lighting, park, villa courtyard, building exterior wall

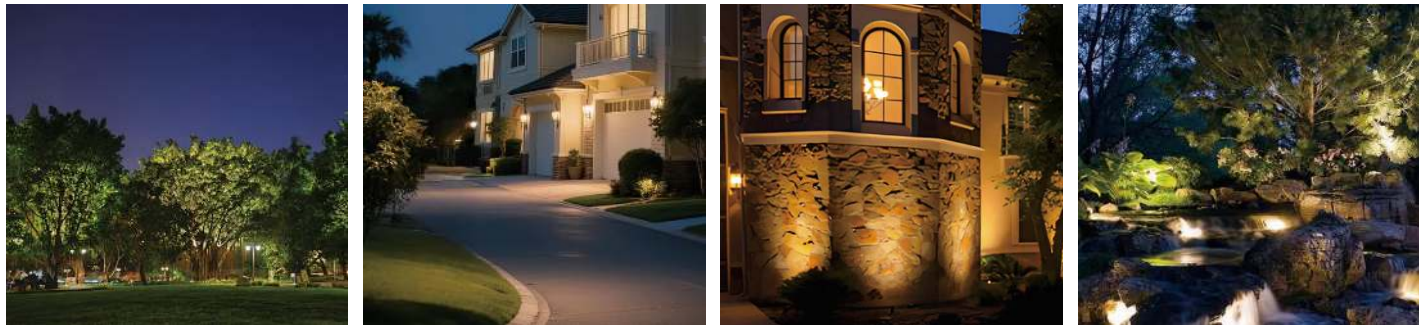

Dimension [MM]

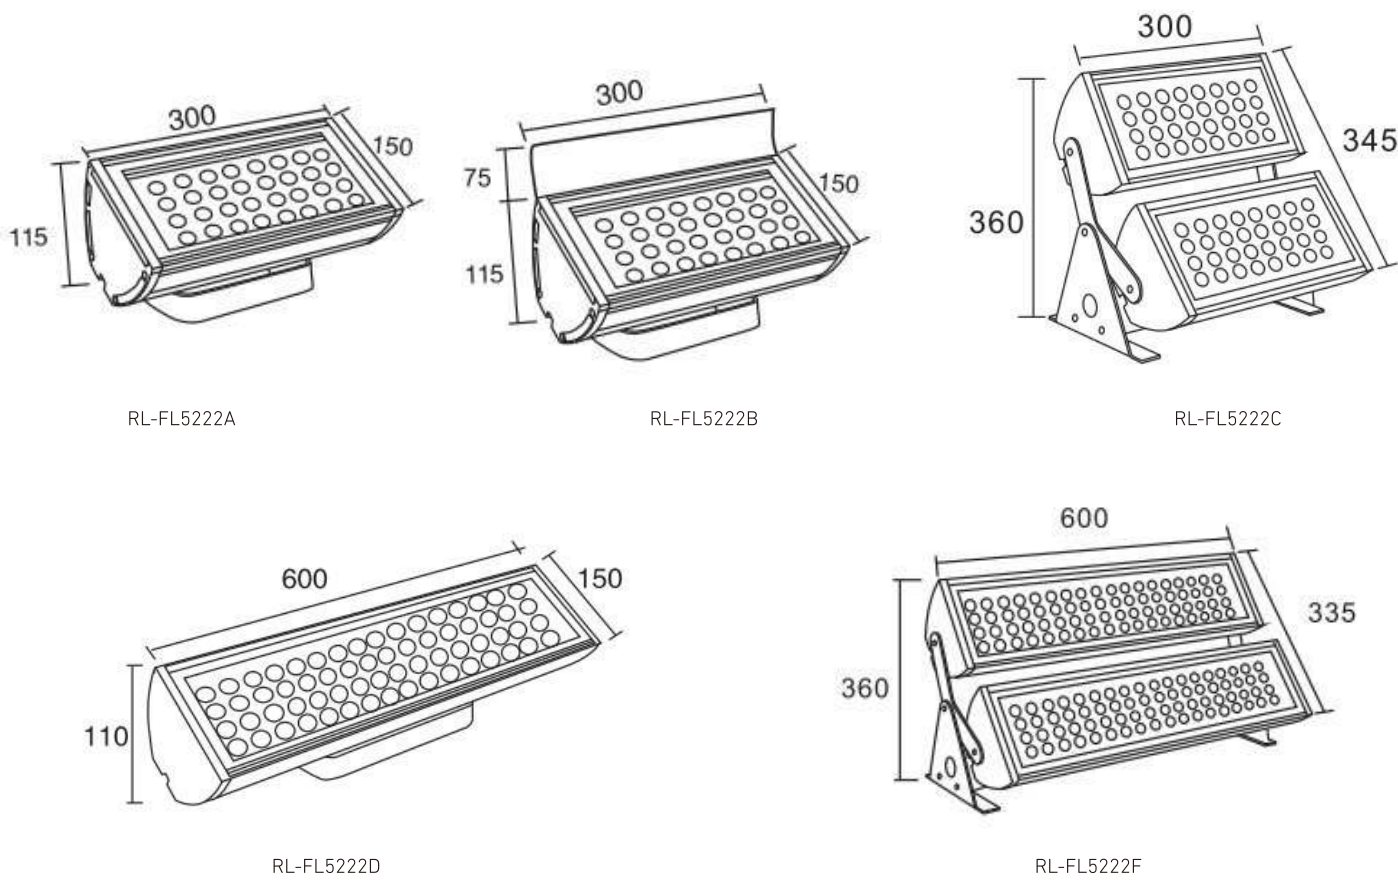

Parameters

Model number	RL-FL5222A	RL-FL5222B	RL-FL5222C	RL-FL5222D	RL-FL5222F
Power	36W	36W	36W*2	72W	72W*2
Material	Aluminum+glass				
Beam angle	5/15/25/45/60/90°				
LUMENS	110-120LM/W				
Color temperature	3000K/4000K/6500K				
DIM. OP	0-10V/1-10V/DALI/DMX512				
ADJUSTABLE	YES				
CHIP	COB				
COLOR	WHITE/BLACK/CUSTOMIZABLE				
CRI	>90				
PF	0.95				
DRIVER	INCLUDED				
VOLTAGE	100-240V				
IP Rating	IP65				
LIFE	50000 hours				
Warranty	5 Years				

RL-FL5223-SERIES

HIGH-EFFICIENCY OUTDOOR LAWN LIGHTS SOLUTION

For outdoor installation, Made of high-quality aluminum with treatment of anti-corrosion and UV-proof powder coating. Glass difuser.



110-120LM/W



Warranty



IP65



IK08



Easy installation



0/1-10V/DALI



50,000H



-20°C~ + 50°C



4/10KV




High brightness



Efficient heat dissipation



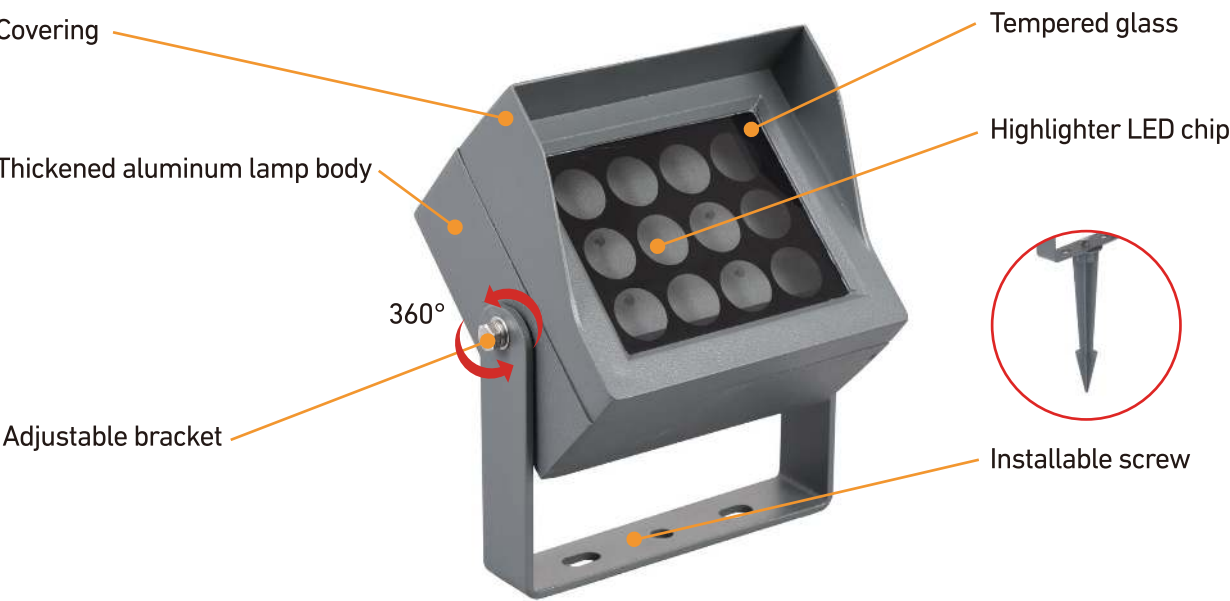


Outdoor Protection

IP65 and IK08 ratings ensure reliable operation in demanding outdoor environments
It can also be used normally in extremely cold or high temperature environment




Applications

The main use of landscape lighting, park, villa courtyard, building exterior wall

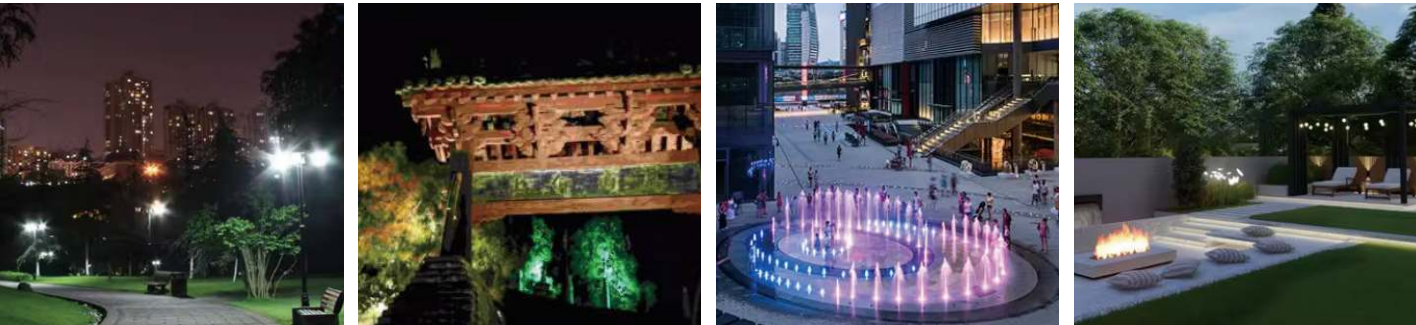

Dimension [MM]

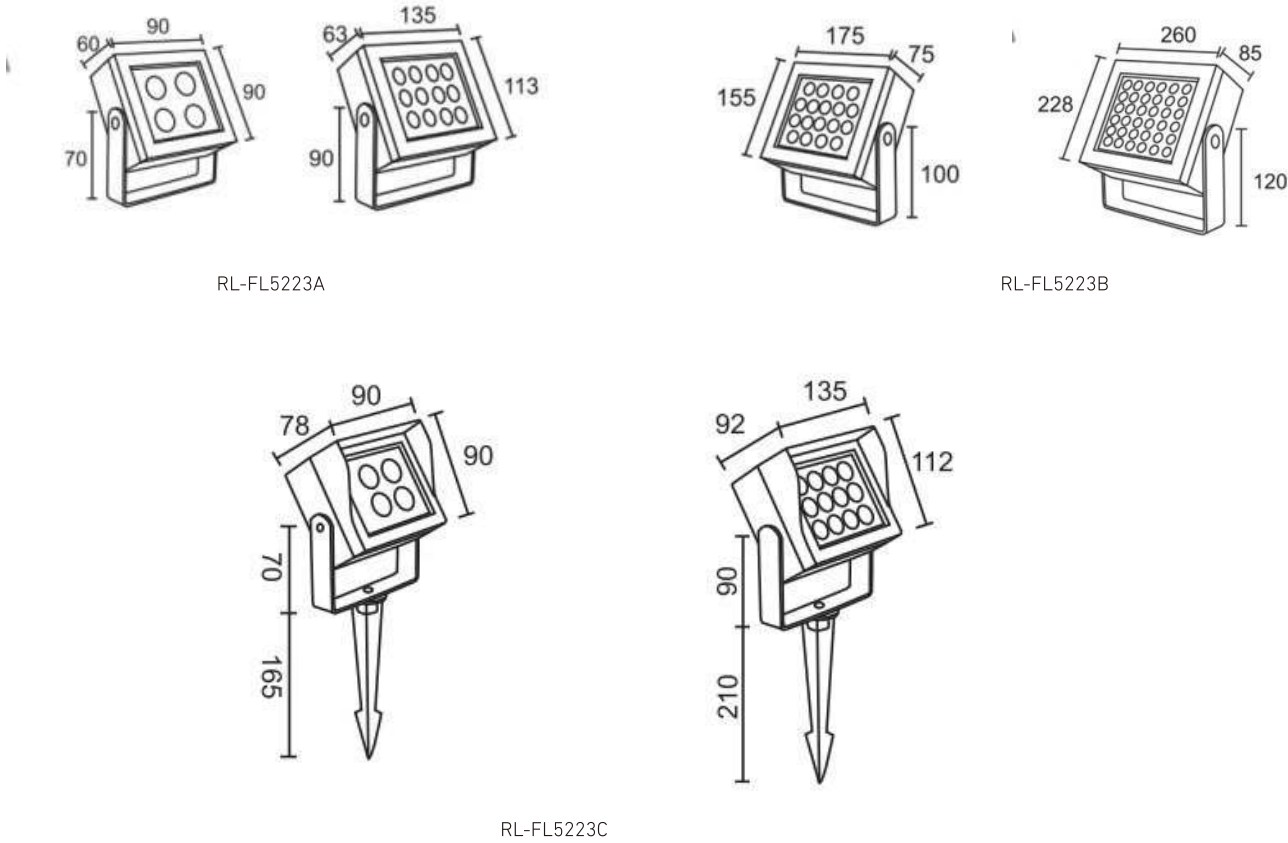

Parameters

Model number	RL-FL5223A	RL-FL5223B	RL-FL5223C
Power	4W,9/12W,18/24W,36/54W	4W,9/12W,18/24W,36/54W	4W,9/12W
Material	Aluminum+glass		
Beam angle	5/15/25/45/60/90°		
LUMENS	110-120LM/W		
Color temperature	3000K/4000K/6500K		
DIM. OP	0-10V/1-10V/DALI/512DMX		
ADJUSTABLE	YES		
CHIP	COB		
COLOR	WHITE/BLACK/CUSTOMIZABLE		
CRI	>90		
PF	0.95		
DRIVER	INCLUDED		
VOLTAGE	100-240V		
IP Rating	IP65		
LIFE	50000 hours		
Warranty	5 Years		

RL-SP3010-SERIES

HIGH-EFFICIENCY LED OUTDOOR LAWN LIGHTS SOLUTION

For outdoor installation, Made of high-quality aluminum with treatment of anti-corrosion and UV-proof powder coating. Glass difuser.



110-120LM/W



Warranty



IP65



IK08



Easy installation



0/1-10V/DALI



50,000H



-20°C~ + 50°C



4/10KV



High brightness




Efficient heat dissipation



SPL3010A



RL-SPL3010B

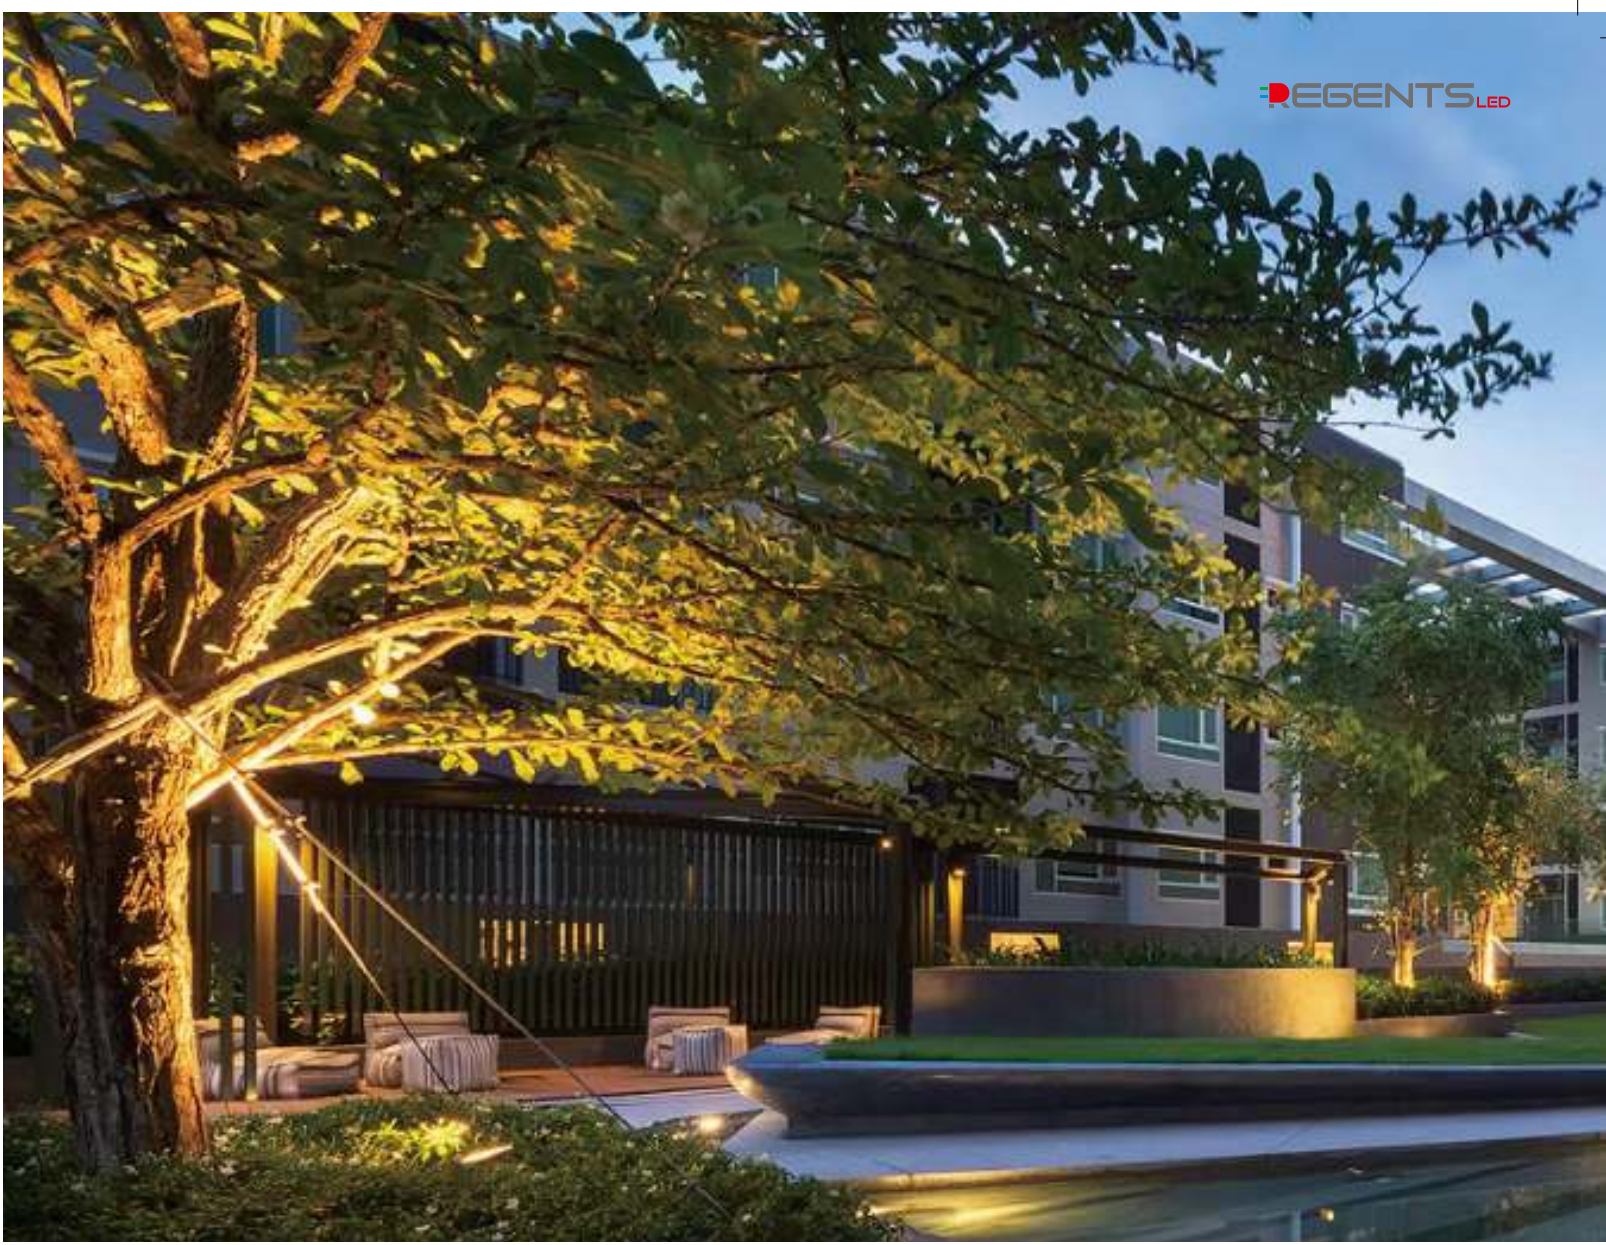

RL-SPL3010C




RL-SPL3010D





Outdoor Protection

IP65 and IK08 ratings ensure reliable operation in demanding outdoor environments. It can also be used normally in extremely cold or high temperature environment

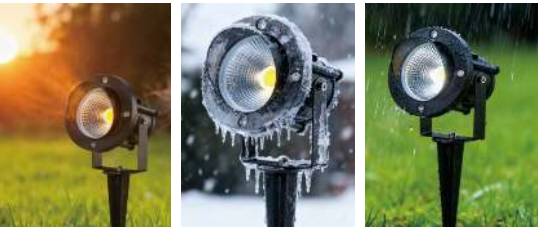


Optical high polymer lens

High light transmittance, long range, and uniform light output



Applications

The main use of landscape lighting, park, villa courtyard,

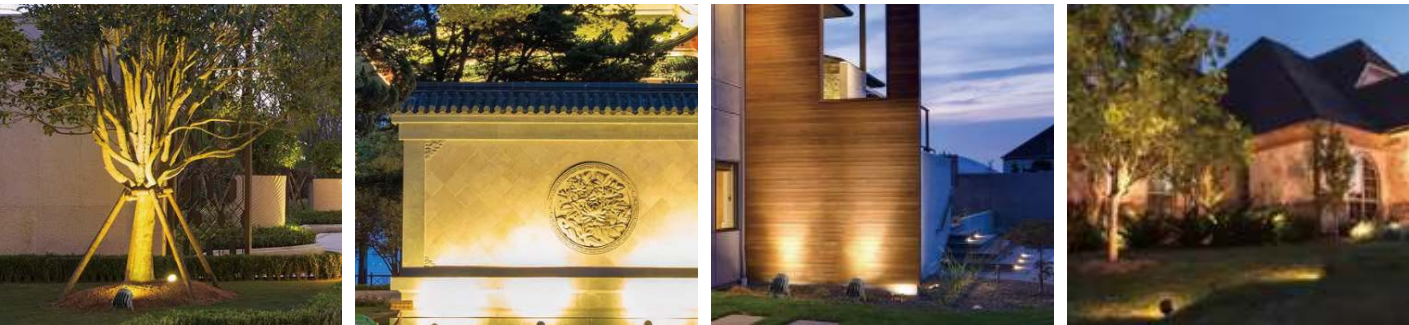




Double waterproof screws

The outlet hole is equipped with multiple layers of waterproof silicone and stainless steel screws.



Double waterproof screws

High-quality aluminum is cast and formed, and the surface is treated with outdoor-specific heat-curing powder coating.

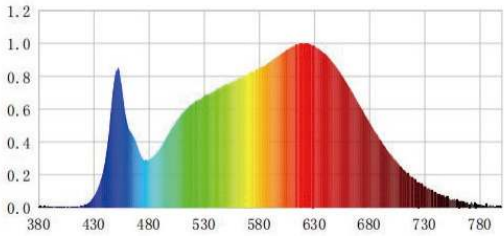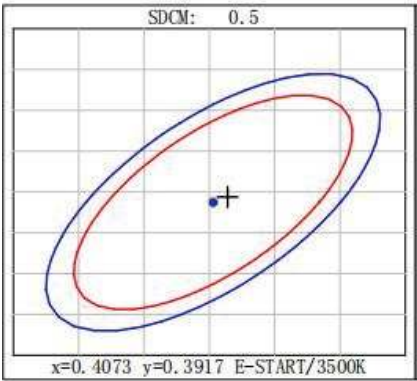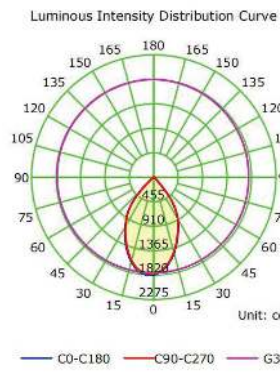

Parameters

Model number	RL-SPL3010A/RL-SPL3010B/RL-SPL3010C/RL-SPL3010D		
Power	3W	6W	12W
Material	Die cast aluminium+glass		
Beam angle	30°/45°		
LUMENS	90LM/W		
Color temperature	3000K/4000K/6500K		
Size	φ60mm	φ75mm	φ95mm
ADJUSTABLE	YES		
DIM.OP	0-10V/1-10V/DALI		
CHIP	Bridgelux COB		
COLOR	WHITE/BLACK/CUSTOMIZABLE		
CRI	>90		
PF	0.95		
DRIVER	INCLUDED		
VOLTAGE	220-240V		
Installation mode	Surfaced		
IP Rating	IP65		
LIFE	50000 hours		
Warranty	5 Years		

RL-SP3011-SERIES

HIGH-EFFICIENCY LED OUTDOOR LAWN LIGHTS SOLUTION

For outdoor installation, Made of high-quality aluminum with treatmentof anti-corrosion and UV-proof powder coating. Glass difuser.



110-120LM/W



Warranty



IP65



IK08



Easy installation



0/1-10V/DALI



50,000H



-20°C~ + 50°C



4/10KV



High brightness



Efficient heat dissipation



RL-SP3011A

RL-SP3011B

Applications

The main use of landscape lighting, park, villa courtyard,



Waterproof plug

High-quality waterproof plug



Aluminum lamp body

Strong and durable, with excellent heat dissipation performance



Highlighting light bulb

Optical lens + Bridgelux chip




Adjustable support bracket



Outdoor Protection

IP65 and IK08 ratings ensure reliable operation in demanding outdoor environments. It can also be used normally in extremely cold or high temperature environment

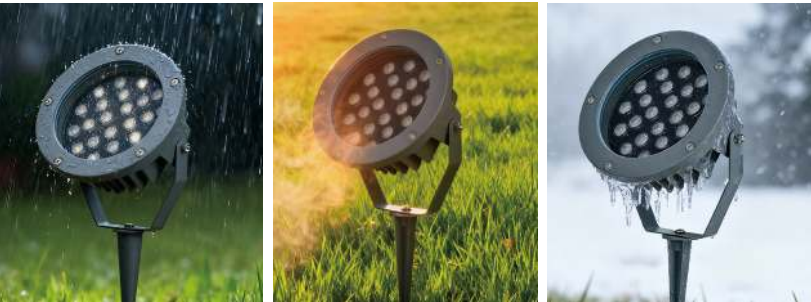

Two styles



Parameters

Model number	RL-SP3011A/RL-SP3011B						
Power	3W	9W	12W	18W	24W	36W	48W
Material	Aluminum+glass						
Beam angle	15°/30°/45°						
LUMENS	90LM/W						
Color temperature	3000K/4000K/6500K						
Size(mm)	D65*H135	D125*H160	D155*H175	D185*H175	D205*H200	D235*H290	D285*H220
DIM. OP	0-10V/1-10V/DALI						
ADJUSTABLE	YES						
CHIP	SMD						
COLOR	WHITE/BLACK/CUSTOMIZABLE						
CRI	>80						
PF	0.5			0.95			
DRIVER	INCLUDED						
VOLTAGE	100-240V						
IP Rating	IP65						
LIFE	50000 hours						
Warranty	5 Years						
Color	Black/White/Gray						

RL-SP3012-SERIES

HIGH-EFFICIENCY LED OUTDOOR LAWN LIGHTS SOLUTION

For outdoor installation, Made of high-quality aluminum with treatment of anti-corrosion and UV-proof powder coating. Glass difuser.


100LM/W


Warranty


IP65


IK08


Easy installation


0/1-10V/DALI


50,000H


-20°C~ + 50°C


4/10KV


High brightness


Efficient heat dissipation



Waterproof plug

High-quality waterproof plug



Aluminum lamp body

Strong and durable, with excellent heat dissipation performance



Highlighting light bulb

Optical lens + Bridgelux chip



Adjustable support bracket



Applications

The main use of landscape lighting, park, villa courtyard,




Outdoor Protection


IP65 and IK08 ratings ensure reliable operation in demanding outdoor environments. It can also be used normally in extremely cold or high temperature environment



Multiple installation options

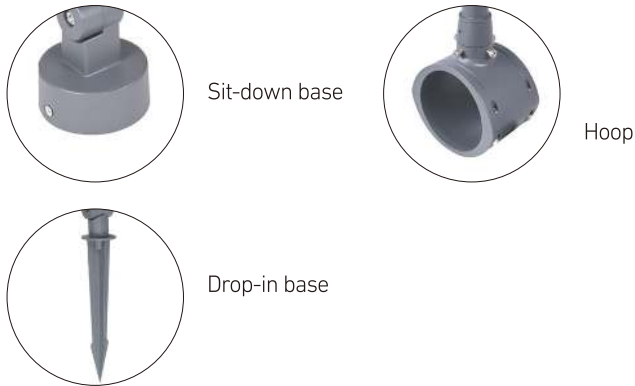

Dimensions

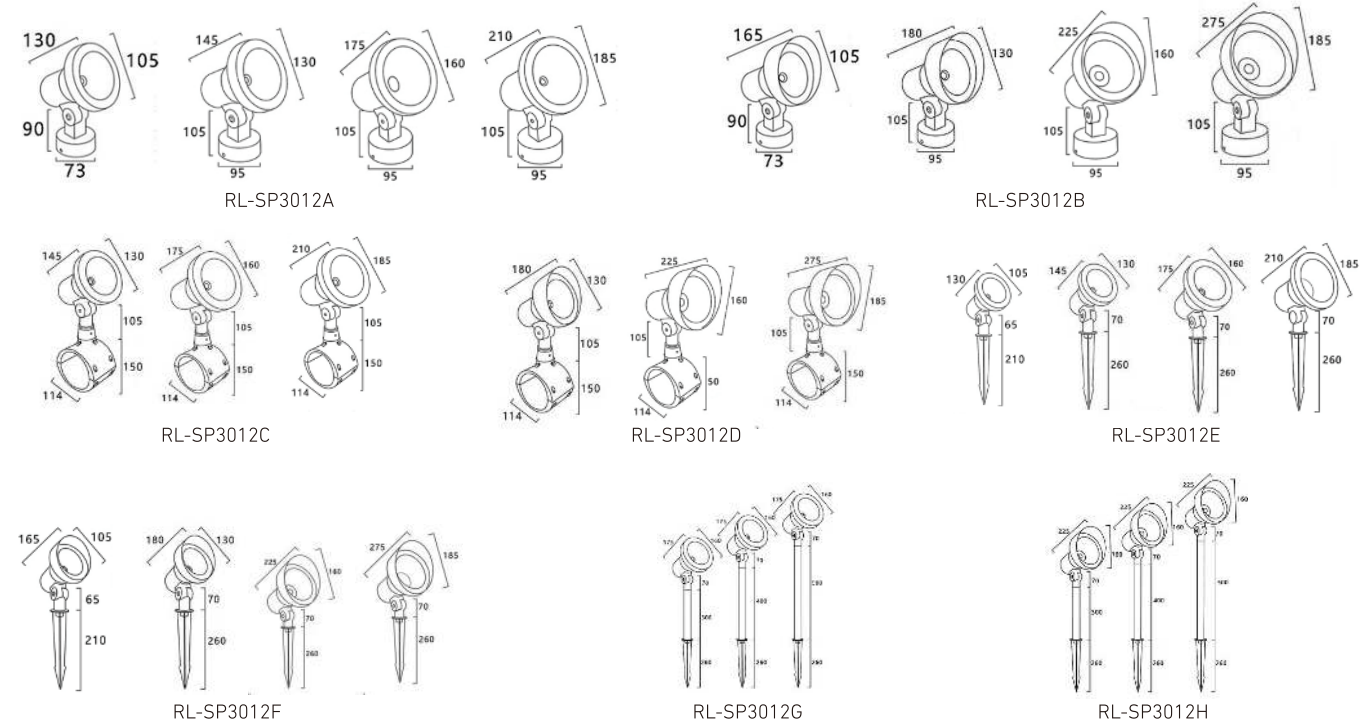

Parameters

Model number	RL-SP3012A	RL-SP3012B	RL-SP3012C	RL-SP3012D	RL-SP3012E	RL-SP3012F	RL-SP3012G	RL-SP3012H
Power	12/20/30/40W		20/30/40W		12/20/30/40W		12/20/30W	
Material	Aluminum+glass							
Beam angle	25/60°							
LUMENS	100LM/W							
Color temperature	3000K/4000K/6500K							
DIM. OP	0-10V/1-10V/DALI							
ADJUSTABLE	YES							
CHIP	COB							
COLOR	WHITE/BLACK/CUSTOMIZABLE							
CRI	>80							
PF	0.9							
DRIVER	INCLUDED							
VOLTAGE	100-240V							
IP Rating	IP65							
LIFE	50000 hours							
Warranty	5 Years							

RL-SPL3013-SERIES

HIGH-EFFICIENCY LED OUTDOOR LAWN LAMP SOLUTION

For outdoor installation, Made of high-quality aluminum with treatment of anti-corrosion and UV-proof powder coating. Glass difuser.



100LM/W



Warranty



IP65



IK08



Easy installation



0/1-10V/DALI



50,000H



-20°C~ + 50°C



4/10KV



High brightness



Efficient heat dissipation



Applications

Suitable for outdoor lighting, balconies, courtyards, store signs, billboards



Outdoor Protection

IP65 and IK08 ratings ensure reliable operation in demanding outdoor environments. It can also be used normally in extremely cold or high temperature environment



Aluminum lamp body

Strong and durable, with excellent heat dissipation performance



Highlighting light bulb

Optical lens + Bridgelux chip



Adjustable support bracket



Parameters

Model number	RL-SPL3013			
Power	10W	20W	30W	40W
Size	φ90*H190mm	φ110*H210mm	φ145*H245mm	φ160*H265mm
Material	Aluminum+glass			
Beam angle	38°/45°/60°	24°/38°/60°	24°/60°	40°
LUMENS	100LM/W			
Color temperature	3000K/4000K/6500K			
DIM. OP	0-10V/1-10V/DALI			
ADJUSTABLE	YES			
CHIP	COB			
COLOR	WHITE/BLACK/CUSTOMIZABLE			
CRI	>90			
PF	0.5			
DRIVER	INCLUDED			
VOLTAGE	100-240V			
IP Rating	IP65			
LIFE	50000 hours			
Warranty	5 Years			

RL-SP3014-SERIES

HIGH-EFFICIENCY LED OUTDOOR LAWN LIGHTS SOLUTION

For outdoor installation, Made of high-quality aluminum with treatment of anti-corrosion and UV-proof powder coating. Glass difuser.



100LM/W



5 YEARS
Warranty



IP65



IK08



Easy installation



DIMMING
0/1-10V/DALI



LIFESPAN
50,000H



-20°C~ + 50°C



4/10KV



High brightness



Efficient heat
dissipation



Applications

The main use of landscape lighting, park, villa courtyard,



Outdoor Protection

IP65 and IK08 ratings ensure reliable operation in demanding outdoor environments. It can also be used normally in extremely cold or high temperature environment



Multiple installation options



Waterproof plug

High-quality waterproof plug



Aluminum lamp body

Strong and durable, with excellent heat dissipation performance



Highlighting light bulb

Optical lens + Bridgelux chip



Adjustable support bracket



Parameters

Model number	RL-SP3014A	RL-SP3014B
SIZE	φ64*H195mm	φ64*H365mm
Power	5-8W	
Material	Aluminum+glass	
Beam angle	24/38°	
LUMENS	100LM/W	
Color temperature	3000K/4000K/6500K	
DIM. OP	0-10V/1-10V/DALI	
ADJUSTABLE	YES	
CHIP	COB	
COLOR	WHITE/BLACK/CUSTOMIZABLE	
CRI	>90	
PF	0.5	
DRIVER	INCLUDED	
VOLTAGE	100-240V	
IP Rating	IP65	
LIFE	50000 hours	
Warranty	5 Years	

RL-SP3015-SERIES

HIGH-EFFICIENCY LED OUTDOOR LAWN LIGHTS SOLUTION

For outdoor installation, Made of high-quality aluminum with treatment of anti-corrosion and UV-proof powder coating. Glass difuser.


100LM/W


Warranty


IP65


IK08


Easy installation


0/1-10V/DALI


50,000H


-20°C~ + 50°C


4/10KV


High brightness


Efficient heat dissipation



RL-SP3015A



RL-SP3015B

Applications

The main use of landscape lighting, park, villa courtyard,



Outdoor Protection

IP65 and IK08 ratings ensure reliable operation in demanding outdoor environments. It can also be used normally in extremely cold or high temperature environment



Multiple installation options



Waterproof plug

High-quality waterproof plug



Aluminum lamp body

Strong and durable, with excellent heat dissipation performance



Highlighting light bulb

Optical lens + Bridgelux chip



Adjustable support bracket



Parameters

Model number	RL-SP3015A	RL-SP3015B
SIZE	φ65*135*H170mm	φ65*135*H210mm
Power	COB10W/GU10 TYPE	
Material	Aluminum+glass	
Beam angle	15/24/38°	
LUMENS	100LM/W	
Color temperature	3000K/4000K/6500K	
DIM. OP	0-10V/1-10V/DALI	
ADJUSTABLE	YES	
CHIP	COB	
COLOR	WHITE/BLACK/CUSTOMIZABLE	
CRI	>90	
PF	0.5	
DRIVER	INCLUDED	
VOLTAGE	100-240V	
IP Rating	IP65	
LIFE	50000 hours	
Warranty	5 Years	

RL-SP3016-SERIES

HIGH-EFFICIENCY LED OUTDOOR LAWN LIGHTS SOLUTION

For outdoor installation, Made of high-quality aluminum with treatment of anti-corrosion and UV-proof powder coating. Glass difuser.


100LM/W


Warranty


IP65


IK08


Easy installation


0/1-10V/DALI


50,000H


-20°C~ + 50°C


4/10KV


High brightness


Efficient heat dissipation



RL-SP3016C



RL-SP3016A



RL-SP3016B

Applications

Suitable for outdoor lighting, balconies, courtyards, store signs, billboards



Outdoor Protection

IP65 and IK08 ratings ensure reliable operation in demanding outdoor environments. It can also be used normally in extremely cold or high temperature environment



Waterproof plug

High-quality waterproof plug



Aluminum lamp body

Strong and durable, with excellent heat dissipation performance




Highlighting light bulb

Optical lens + Bridgelux chip



Adjustable support bracket



Parameters

Model number	RL-SP3016A		RL-SP3016B			RL-SP3016C		
Power	5-7W	10W	15W	20W	5W	8W	12W	18W
Material	Aluminum+glass							
Beam angle	15 ° 24° 36°	15 ° 24° 37°			15 ° 24° 36°			
LUMENS	100LM/W							
Color temperature	3000K/4000K/6500K							
DIM. OP	0-10V/1-10V/DALI							
ADJUSTABLE	YES							
CHIP	COB							
SIZE	WHITE/BLACK/CUSTOMIZABLE							
CRI	>90							
PF	0.5							
DRIVER	INCLUDED							
VOLTAGE	100-240V							
IP Rating	IP65							
LIFE	50000 hours							
Warranty	5 Years							

RL-SP3017-SERIES

HIGH-EFFICIENCY LED OUTDOOR LAWN LIGHTS SOLUTION



100LM/W



Warranty



IP65



IK08



Easy installation



0/1-10V/DALI



50,000H



-20°C~ + 50°C



4/10KV



High brightness



Efficient heat dissipation



RL-SP3017A



RL-SP3017B

Applications

Suitable for outdoor lighting, courtyards, park



Outdoor Protection

IP65 and IK08 ratings ensure reliable operation in demanding outdoor environments. It can also be used normally in extremely cold or high temperature environment



Waterproof plug

High-quality waterproof plug



Aluminum lamp body

Strong and durable, with excellent heat dissipation performance



Highlighting light bulb

Optical lens + Bridgelux chip



Adjustable support bracket



Parameters

MODEL NUMBER	RL-SP3017A		RL-SP3017B
POWER	10W		
MATERIAL	Aluminum+glass		
BEAM ANGLE	15 ° 24° 36°		
LUMENS	100LM/W		
COLOR TEMPERATURE	3000K/4000K/6500K		
DIM. OP	0-10V/1-10V/DALI		
ADJUSTABLE	YES		
CHIP	COB		
SIZE	φ65*H125MM		φ65*H185MM
CRI	>90		
PF	0.5		
DRIVER	INCLUDED		
VOLTAGE	100-240V		
IP Rating	IP65		
LIFE	50000 hours		
Warranty	5 Years		
COLOR	WHITE/BLACK/CUSTOMIZABLE		

RL-SP3018-SERIES

RL-SP3019-SERIES

HIGH-EFFICIENCY

LED Outdoor Lawn lamp

SOLUTION

For outdoor installation, Made of high-quality aluminum with treatmentof anti-corrosion and UV-proof powder coating. Glass difuser.



100LM/W



Warranty



IP65



IK08



Easy installation



0/1-10V/DALI



50,000H



-20°C~ + 50°C



4/10KV



High brightness



Efficient heat dissipation



Applications

Suitable for outdoor lighting, courtyard, villa, trail, park



Outdoor Protection

IP65 and IK08 ratings ensure reliable operation in demanding outdoor environments. It can also be used normally in extremely cold or high temperature environment



Waterproof plug

High-quality waterproof plug



Aluminum lamp body

Strong and durable, with excellent heat dissipation performance




Highlighting light bulb

Optical lens + Bridgelux chip



Adjustable support bracket

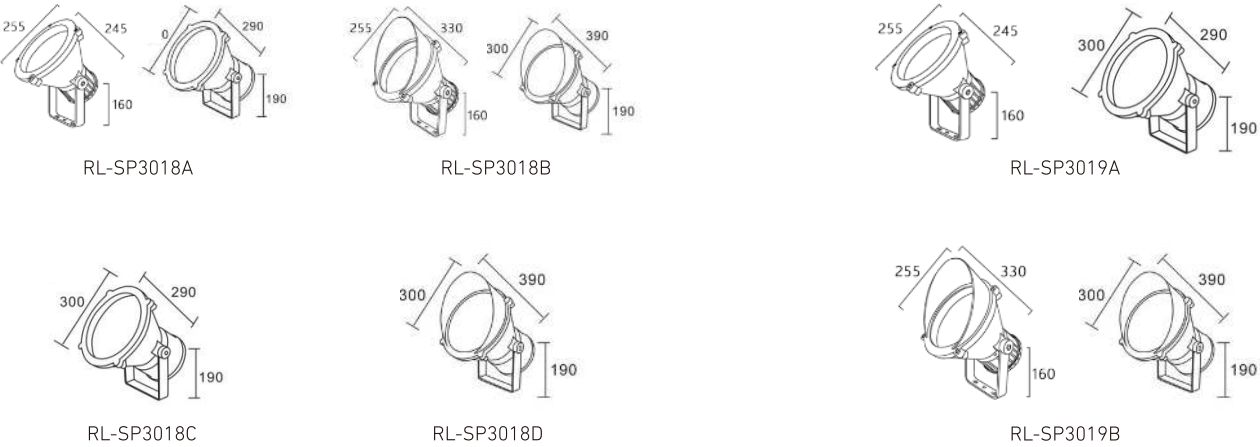

Parameters

Model number	RL-SP3018A	RL-SP3018B	RL-SP3018C	RL-SP3018D	RL-SP3019A	RL-SP3019B
Power	36W/60W		60W		36W,60-80W	
Beam angle	60°				5/15/25/45/60/90°	
Light source	COB					
Material	Die-cast aluminum/toughened glass/waterproof apron					
LUMENS	80LM/W					
Color temperature	3000K/4000K/6500K					
DIM. OP	0-10V/1-10V/DALI					
ADJUSTABLE	YES					
CHIP	COB					
COLOR	WHITE/BLACK/CUSTOMIZABLE					
CRI	>80					
PF	0.5					
DRIVER	INCLUDED					
VOLTAGE	100-240V					
IP Rating	IP65					
LIFE	50000 hours					
Warranty	5 Years					