



LED LINEAR LIGHT



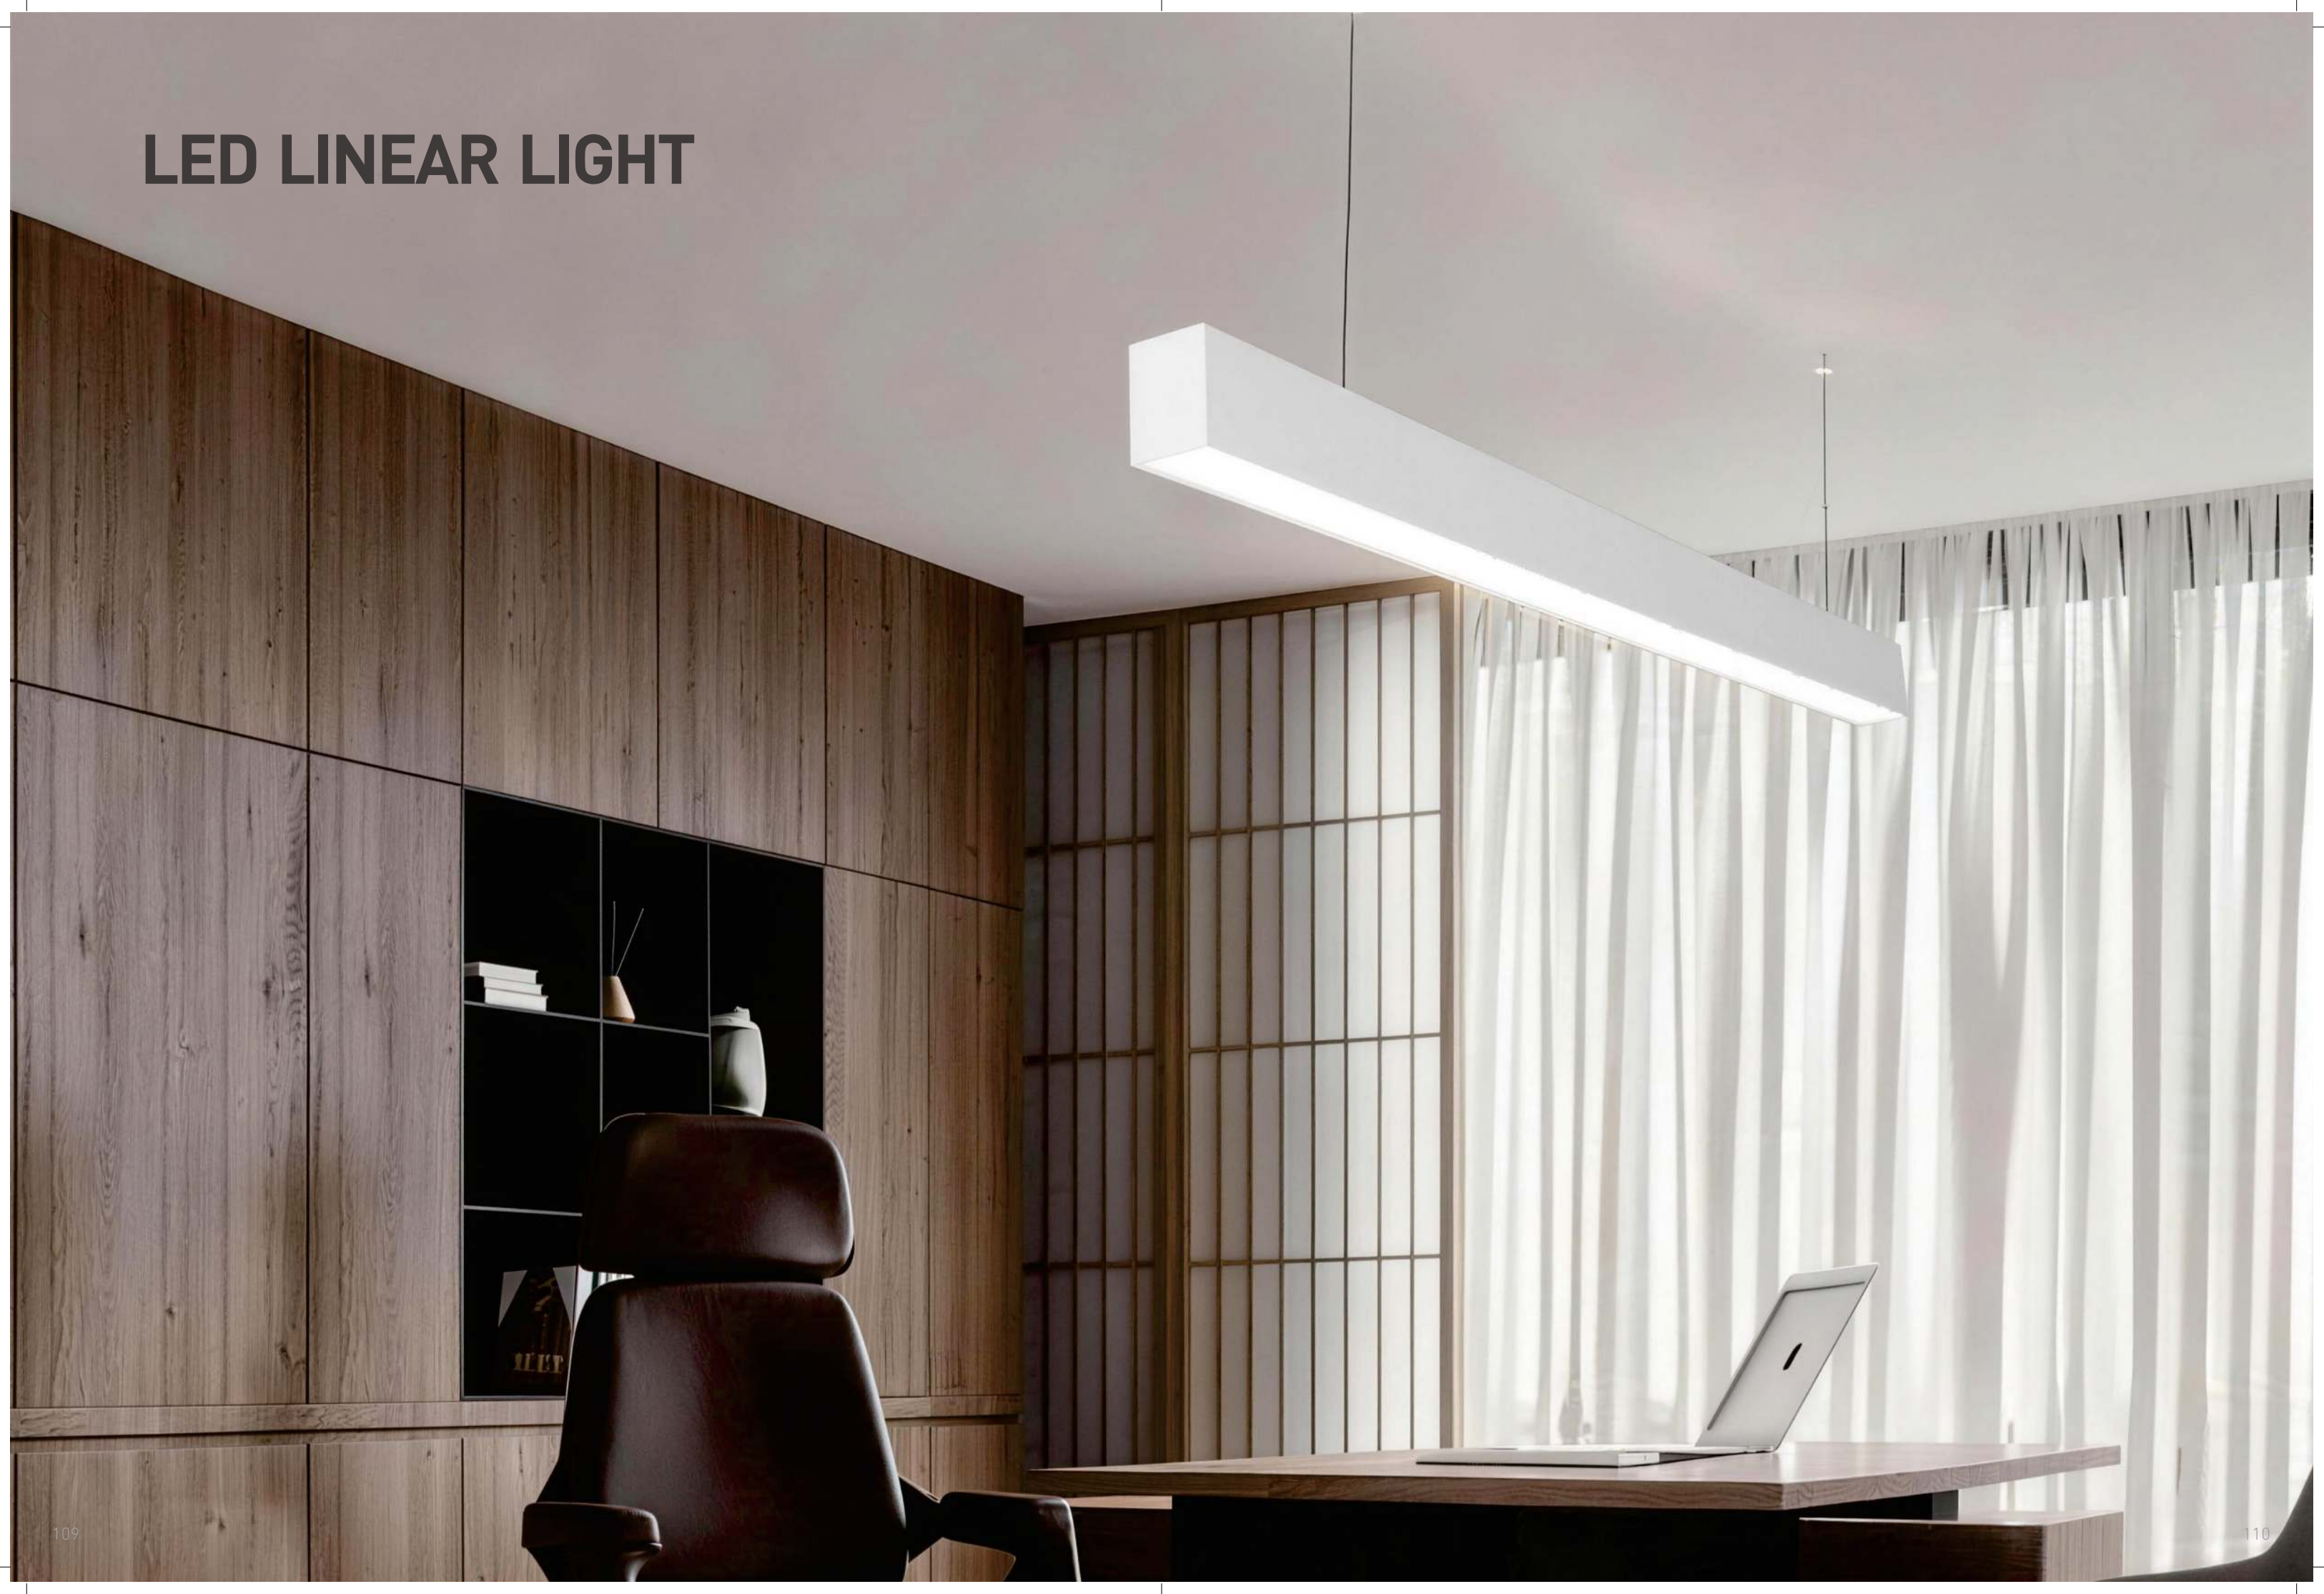

Adapter | Variety Of Forms, diverse Joining Methods

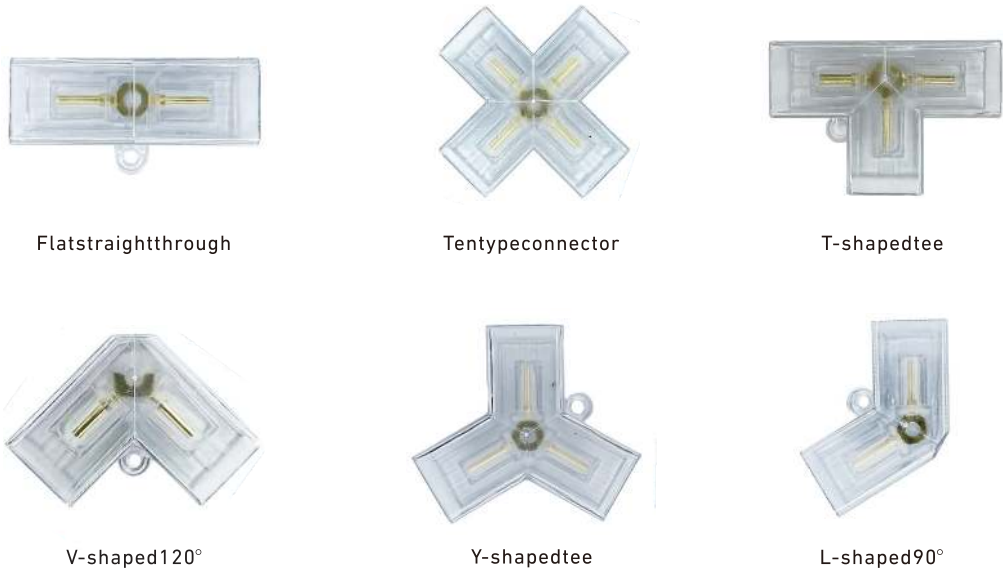

RL-LIN-SS-SERIES
LED linear light

Five-sided emitting,
three-proofing strip light.
Customizable combination shapes
according to customer needs.

This linear light adopts a dual-wire power supply
and a direct-plug design, allowing for customization
of various shapes according to customer needs.
It can be used for both ceiling and suspended ceiling
installation, suitable for multiple scenarios.



Customized
on demand



100-110LM/W



Warranty
2 YEARS



220-240V



IP20



20,000H




0-10V/1-10V/
DALI



CCT
switchable


Size

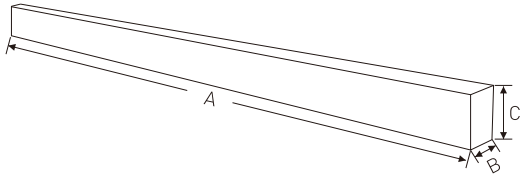

Parameters

Model No.	RL-LIN-SS-SERIES	
Power	7W	16W
Size(MM)	440*22*35	1175*22*35
Lumens	100-110LM/W	
COL. TEMP	3000K/4000K/6500K/CCT	
Adjustable	NO	
Material	PC	
Colour	White	
Chip	SMD	
CRI	>80	
PF	0.5	
Driver	Included	
Voltage	220-240V	
IP Rating	IP20	
Life	20000 hours	
Warranty	2 Years	
DIM. OP	0-10V/1-10V/DALI	

Example of Use Effect

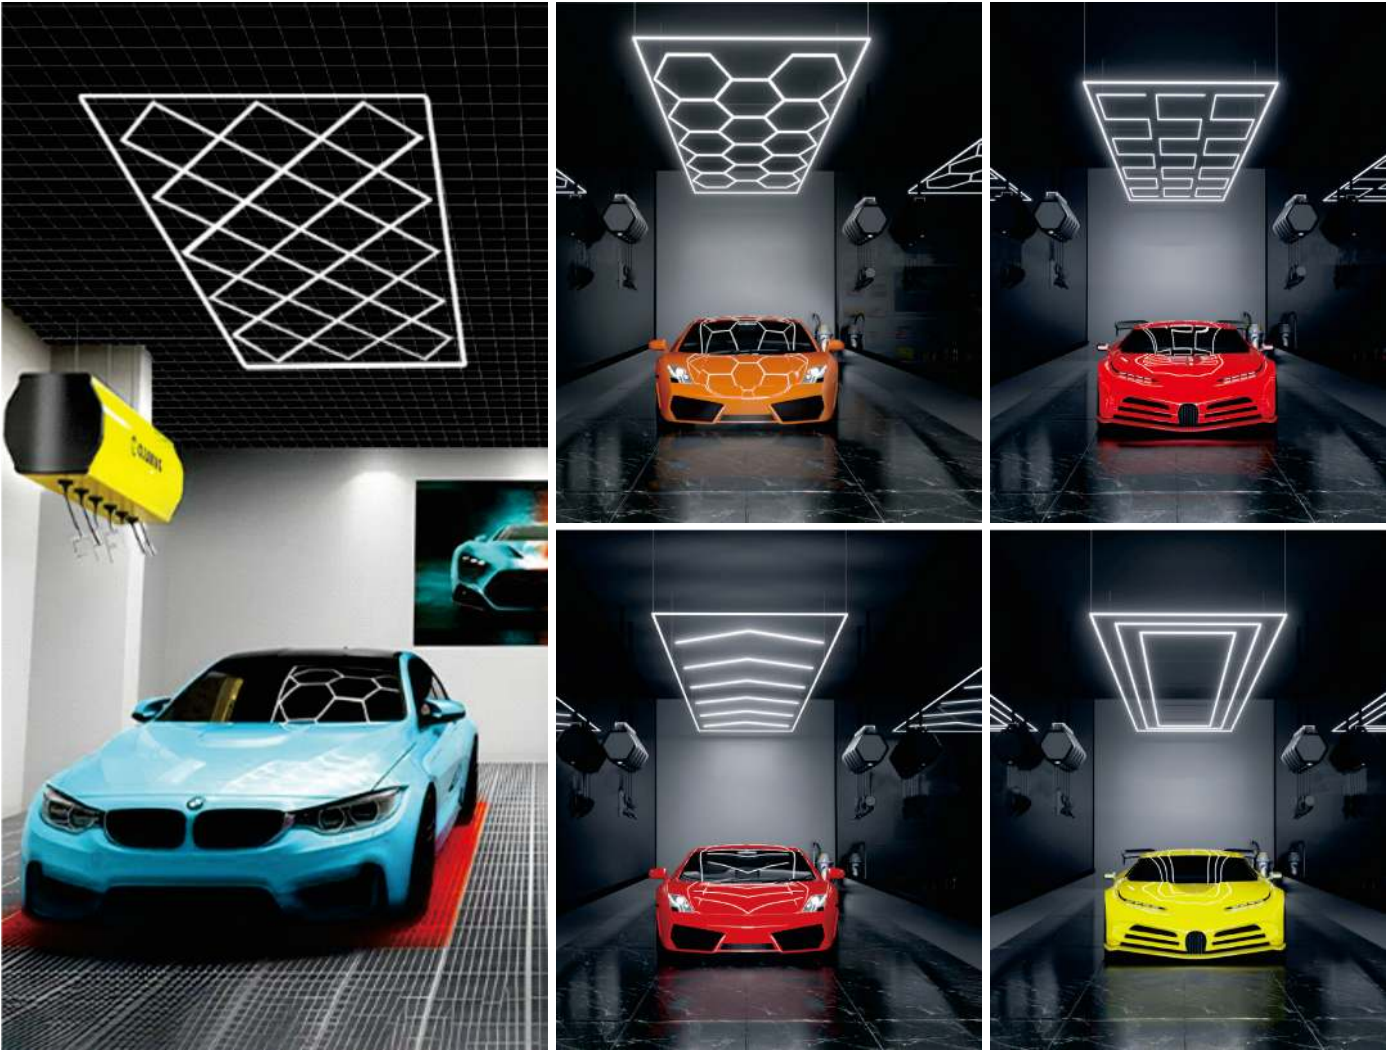



RL-LIN-REC-SERIES
Embedded linear light

Multiple specifications are available for selection;
length can be customized according to customer needs.

Seamless integration creates a more aesthetically
pleasing appearance,
It is highly suitable for creating high-end
commercial spaces.



Customized
on demand



80LM/W



Warranty



220-240V



IP20



50,000H



0-10V/1-10V/
DALI




CCT
switchable

Parameters


Model No.	RL-LIN-REC-50W
Flux(LM)	80LM/W
DIM. OP	0-10V/1-10V/DALI
PF	0.95
COL. TEMP	3000K/4000K/6500K/CCT
Material	Aluminium/PC
Colour	White/Black
Chip	SMD
CRI	80
Driver	Included
Adjustable	NO
Voltage	220-240V
IP	IP20
Life	50000 hours
Warranty	5 Years





Size




Product cross-sectional dimensions(MM)
(Customizable length)

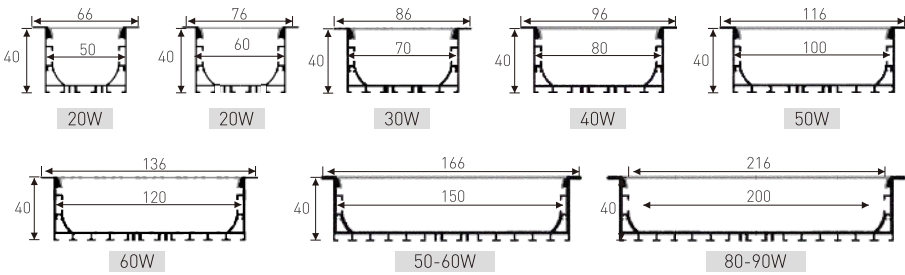

Power	20W	20W	30W	40W	50W	60W	50-60W	80-90W
Size(MM) (A*B*C)	1000*66*35	1000*76*40	1000*86*40	1000*96*40	1000*116*40	1000*136*40	1000*166*40	1000*216*40
Cutout(A*D*C)	1000*50*35	1000*60*40	1000*70*40	1000*80*40	1000*100*40	1000*120*40	1000*150*40	1000*200*40

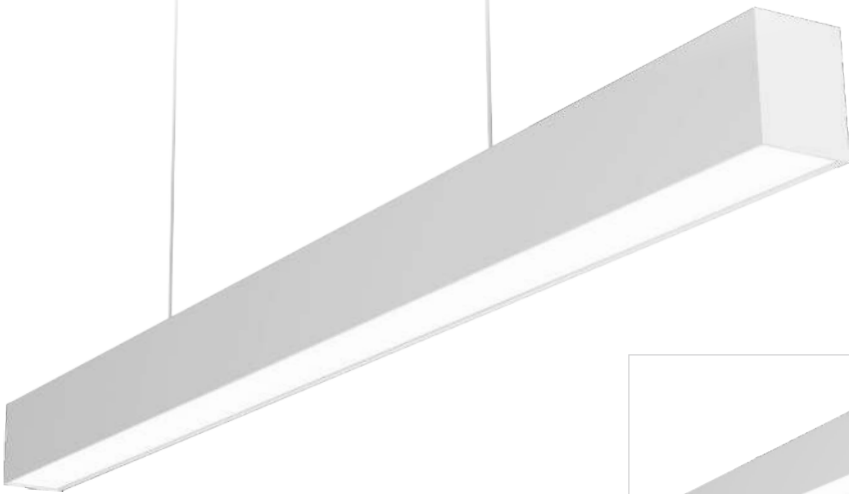

White



Black

RL-LIN1200-SERIES
RL-LIN3030-18W
RL-LIN3010-30W

Surface/ Suspended Linear Light
length can be customized according to customer needs.



Customized
on demand



Sealing
design



Warranty



220-240V



IP20



50,000H



0-10V/1-10V/
DALI




Easy
Installation




RL-LIN3030-18W

length can be customized according to customer needs.

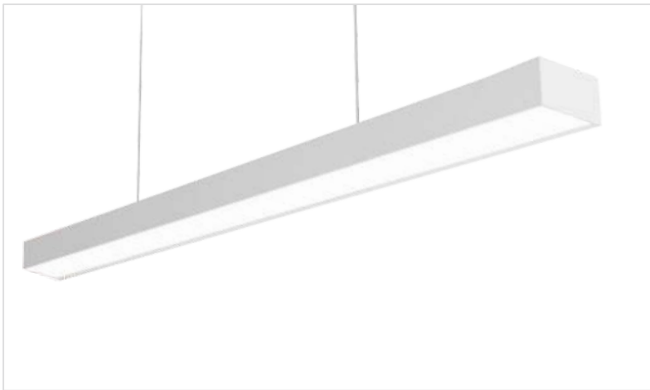


RL-LIN3010-30W


Surface/ Suspended Linear Light
length can be customized according to customer needs.

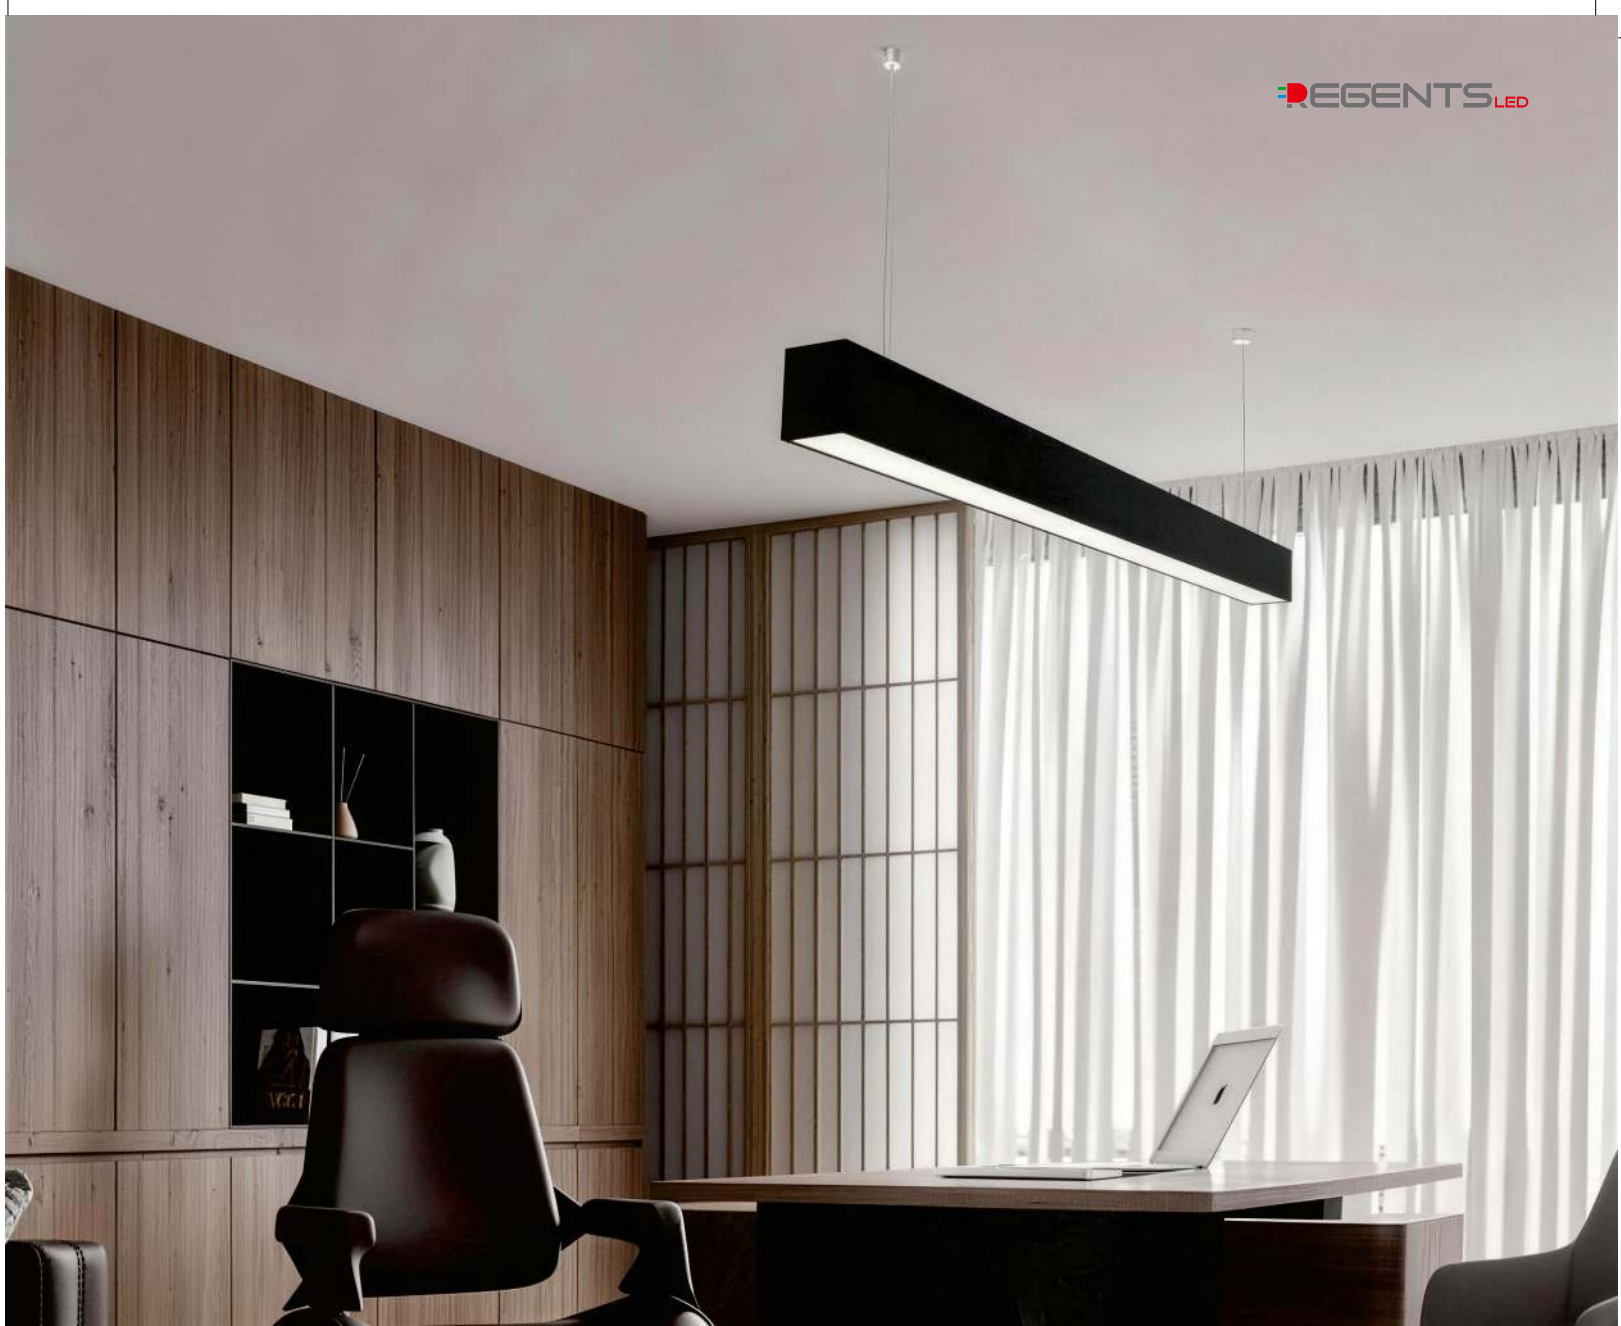

Size(MM)

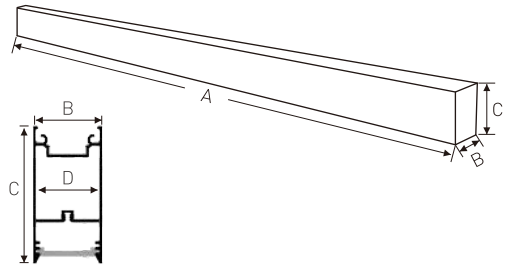

Product cross-sectional dimensions(MM)
(Customizable length)

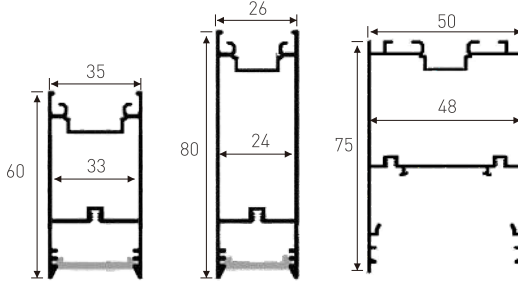

RL-LIN1200-SERIES

RL-LIN3030-18W

RL-LIN3010-30W

Parameters

Model No.	RL-LIN1200-SERIES	RL-LIN3030-18W	RL-LIN3010-30W
Size(MM)(A*B*C)	1200*35*60	1200*26*80	1200*50*75
Power	36W	24W	30W
Lumens	80LM/W	70LM/W	80LM/W
COL. TEMP	3000K/4000K/6500K/CCT	3000K/4000K/6500K	3000K/4000K/6500K
DIM. OP	/	/	0-10V/1-10V/DALI
Adjustable	NO		
Material	Aluminium / PC		
Chip	SMD		
CRI	80		
PF	0.95		
Driver	Included		
Voltage	220-240V		
IP Rating	IP20		
Life	50000 hours		
Warranty	5 Years		