


LED PENDANT LIGHT



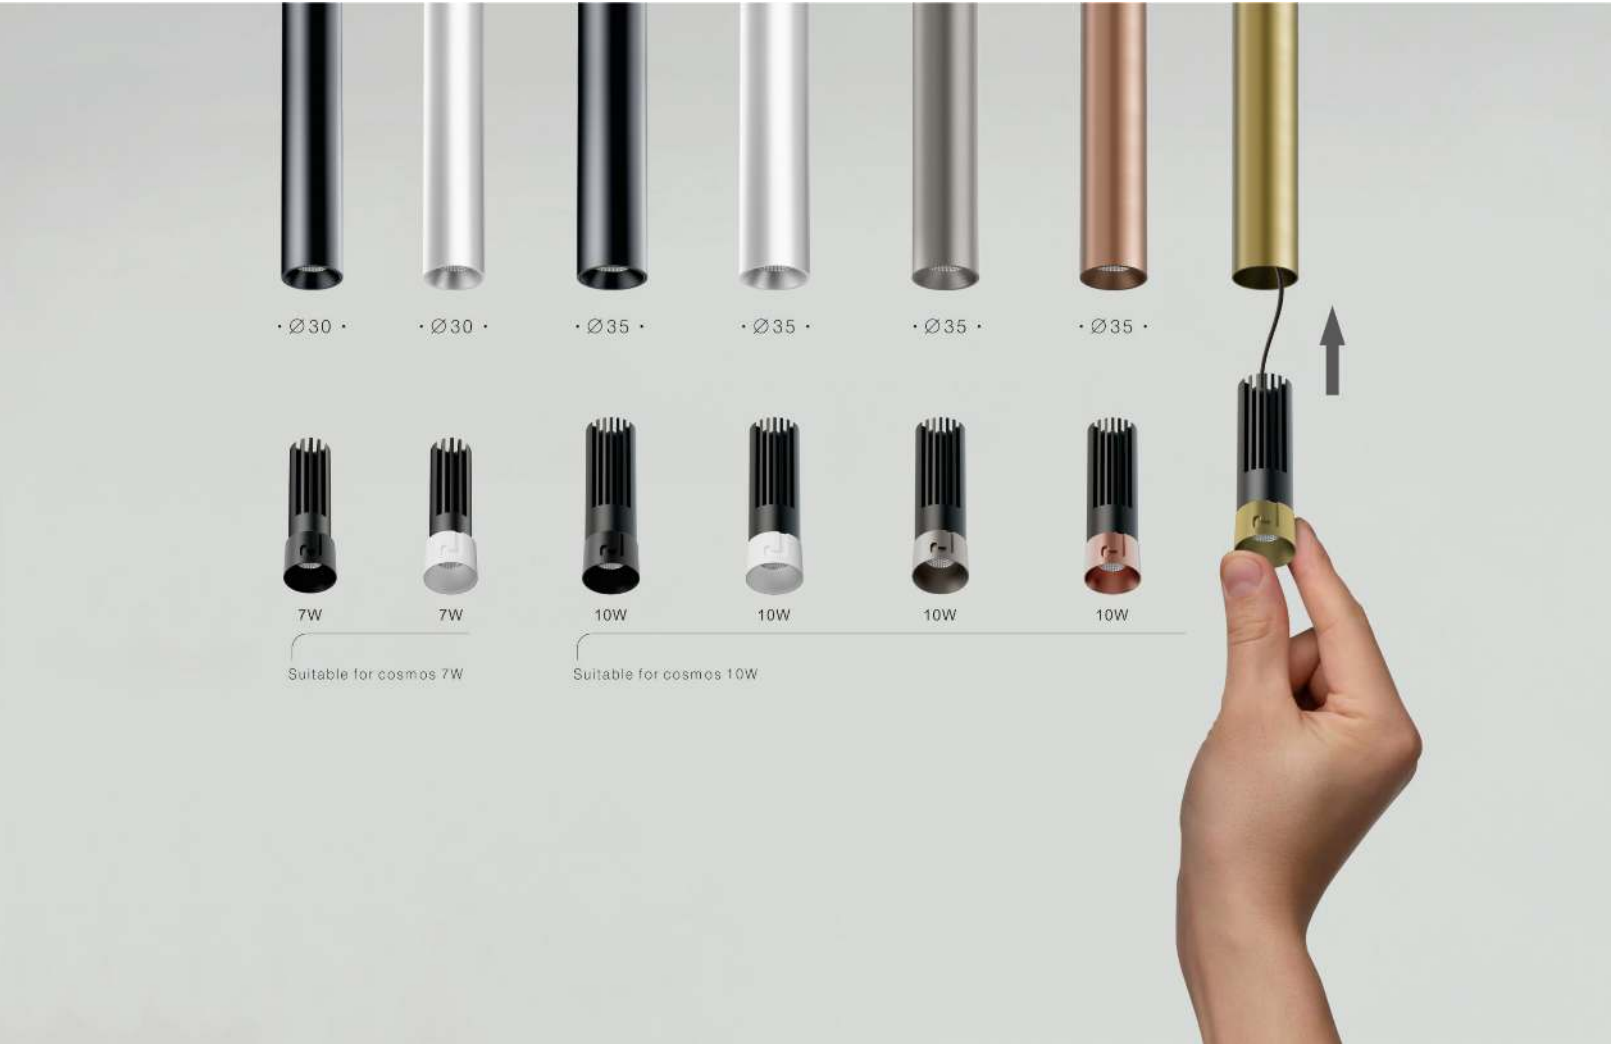

RL-PD6001-SERIES LED Pendant Light

For this range of luminaire installations, available in 5W and 8W luminaire combinations, designed for accent lighting, emphasizing the verticality of the suspension in the application space. The levity of such a light aesthetic piece is one of its greatest attractions. Reduces the visual weight of the installation and produces a minimalist aesthetic.



80LM/W



Warranty



100-240V



IP20



15° 24° 36°



50,000H




0-10V/1-10V/
DALI



Power
switchable

Size(MM)

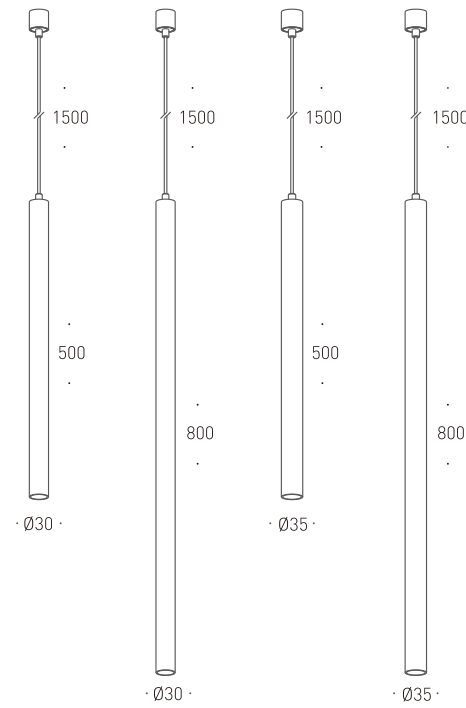

Parameters


Model No.	RL-PD6001-SERIES
Power	5 W / 8 W
Beam angle	15° 24°36°
Lumens	80LM/W
COL. TEMP	3000K/4000K/6500K
DIM. OP	0-10V/1-10V/DALI
Adjustable	NO
Material	Aluminium / PC
Chip	COB
CRI	>90
PF	0.5
Driver	Included
Voltage	100-240V
IP Rating	IP20
Life	50000 hours
Warranty	5 Years

RL-PD6004-SERIES
LED Pendant Light

Ceiling-mounted/Wall-hung, two installation modes
Deep Anti-glare; 60° Anti-glare Beam Angle
Acrylic shade; soft light effect, high light transmittance.
All-aluminum body; extends the lamp's lifespan,
thickened for enhanced durability.
LED Chip; Eye-friendly and Flicker-free.



Size(MM)

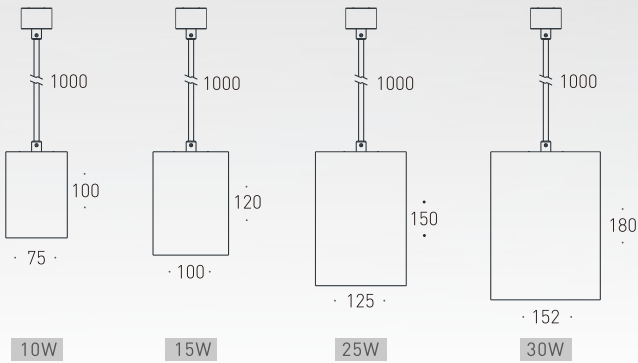


Parameters


Model No.	RL-PD6004-SERIES			
Power	10W	15W	25W	35W
Beam angle	60°			
Lumens	100LM/W			
COL. TEMP	3000K/4000K/6500K			
DIM. OP	0-10V/DALI			
Adjustable	NO			
Material	Aluminium / PC			
Colour	White/Black			
Chip	SMD/COB			
CRI	>90			
PF	0.5	0.5	0.95	0.95
Driver	Included			
Voltage	100-240V			
IP Rating	IP20			
Life	50000 hours			
Warranty	5 Years			

RL-PD6008-SERIES
LED Pendant Light

Simple design, classic style,
suitable for various spaces such as dining rooms and offices,
creating a stylish and comfortable environment,
available in white or black.

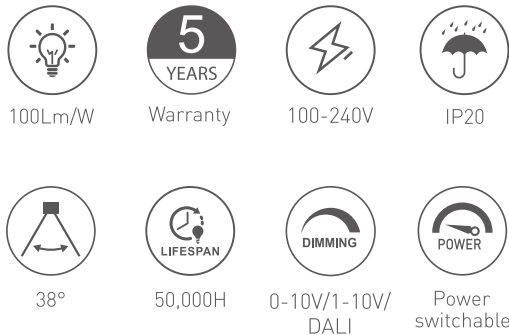

Size(MM)

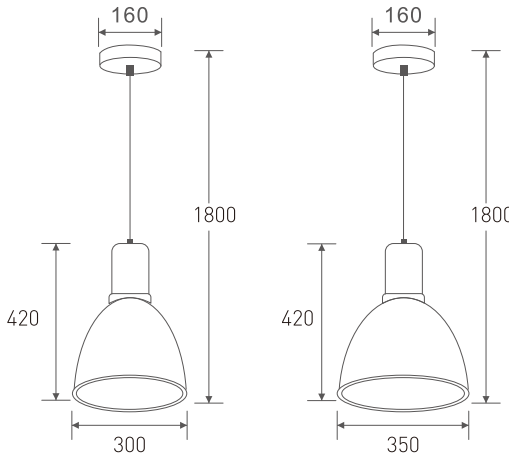

Parameters

Model No.	RL-PD6008-SERIES
Power	20W/30W
Angle of illumination	38°
Lumens	100LM/W
COL. TEMP	3000K/4000K/6500K
DIM. OP	0-10V/1-10V/DALI
Adjustable	NO
Material	Aluminium / PC
Colour	White/black
Chip	SMD/COB/E27
CRI	>90
PF	0.95
Driver	Included
Voltage	100-240V
IP Rating	IP20
Life	50000 hours
Warranty	5 Years

RL-PD9010-SERIES
LED Pendant Light

LED energy-saving light source,
with a freely rotatable lamp head,
suitable for various commercial spaces,
creating a high-end consumer experience.



80Lm/W



Warranty



100-240V



IP20



15°24°36°55°




50,000H





0-10V/1-10V/
DALI



Power
switchable

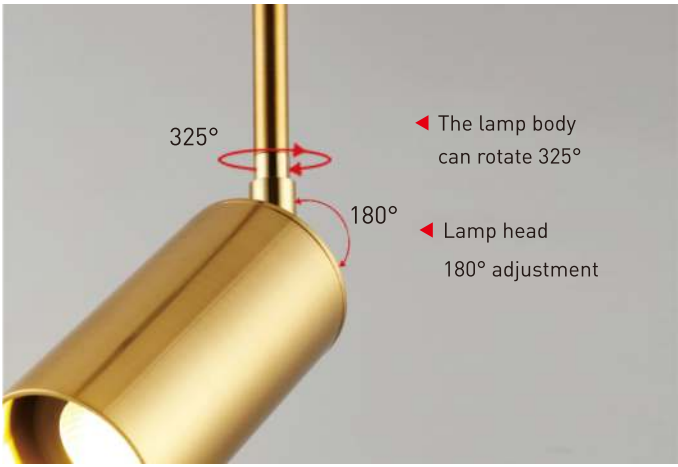

Size(MM)

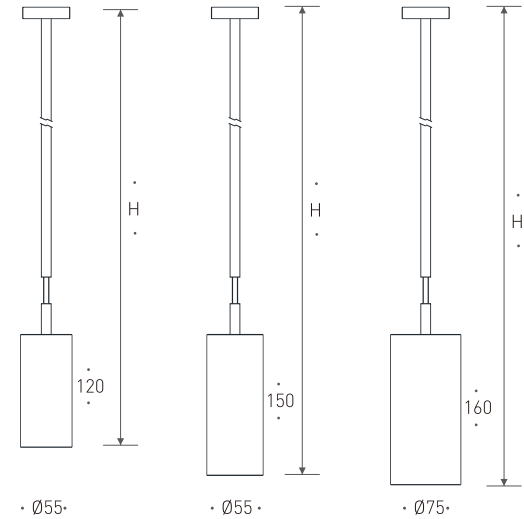

Parameters

Model No.	RL-PD9010-SERIES		
Power	7-10W	15W	20-30W
Lamp holder size (MM)	Ø55*120	Ø60*150	Ø75*160
PF	0.5	0.5	0.95
Overall dimensions (MM)	H15-30CM/H25-50CM/H50-100CM/H75-150CM		
Angle of illumination	15° 24°36°55°		
Lumens	100LM/W		
COL. TEMP	3000K/4000K/6500K		
DIM. OP	0-10V/1-10V/DALI		
Adjustable	YES		
Material	Aluminium / PC		
Chip	COB		
CRI	>90		
Driver	Included		
Voltage	100-240V		
IP Rating	IP20		
Life	50000 hours		
Warranty	5 Years		



RL-PD9012-SERIES



RL-PD9015-SERIES

RL-PD9016-SERIES



RL-PD9013-SERIES

RL-PD9014-SERIES



PMMA light guide cup
Anti-glare, good light concentration,
high light transmittance, uniform illumination

Reflecting light from the wall
Exquisite workmanship,
strong corrosion resistance

Parameters

Model No.	RL-PD9012-SERIES	RL-PD9013-SERIES	RL-PD9014-SERIES	RL-PD9015-SERIES	RL-PD9016-SERIES
Power	5-7W	7-10W	7-10W	10W	10W
Angle of illumination	15° 24°36°55°	15° 24°36°	15° 24°36°	24°36°	15°24°36°50°
Size (MM)	Ø30MM/50MM*H300MM	Ø50MM*H270MM	Ø50MM*H270MM	Ø45*H350MM	Ø75*H350MM
Lumens	100LM/W				
COL. TEMP	3000K/4000K/6500K				
DIM. OP	0-10V/1-10V/DALI				
Adjustable	NO				
Material	Aluminium / PC				
Chip	COB				
CRI	>90				
PF	0.5				
Driver	Included				
Voltage	100-240V				
IP Rating	IP20				
Life	50000 hours				
Warranty	5 Years				



RL-PD9030-SERIES
LED Pendant Light

This chandelier features a lively design, comes in several styles, and offers various specifications, allowing it to suit different spaces and create a modern, contemporary ambiance.



Power	20W	40W	50W	60W
Size(MM)	L600*300*H70	L900*300*H70	L1000*300*H70	L1200*300*H70
Lumens	90LM/W			
COL. TEMP	3000K/4000K/6500K/CCT			
DIM. OP	0-10V/1-10V/DALI			
Adjustable	NO			
Material	Aluminium / PC			
Colour	White/Black			
Chip	SMD			
CRI	>90			
PF	0.95			
Driver	Included			
Voltage	100-240V			
IP Rating	IP20			
Life	50000 hours			
Warranty	5 Years			



Power	30W	40W	50W	60W	80W	120W	150W
Size(MM)	D500H80	D600H80	D800H80	D1000H80	D1200H80	D1500H80	D2000H80
Lumens	80LM/W						
COL. TEMP	3000K/4000K/6500K/CCT						
DIM. OP	0-10V/1-10V/DALI						
Adjustable	NO						
Material	Aluminium / PC						
Colour	White/black/Golden						
Chip	SMD						
CRI	>80						
PF	0.95						
Driver	Included						
Voltage	100-240V						
IP Rating	IP20						
Life	50000 hours						
Warranty	5 Years						

RL-PNT-CIR-SERIES
LED Pendant Light

This chandelier is suitable for offices, gyms, internet cafes, supermarkets, and more. It comes in various sizes that can be freely combined to create a high-end, stylish environment.



RL-PNT-CIR02-SERIES
LED Pendant Light

This chandelier is suitable for offices, gyms, internet cafes, supermarkets, etc., and is available in both pendant and ceiling-mounted styles. It features a stylish design and offers flexible use.



RL-PNT-CIR03-SERIES
LED Pendant Light

This pendant light is suitable for offices, gyms, internet cafes, supermarkets, and more. The hanging wire is 100cm long and can be freely adjusted as needed.



Power	30W	40W	50W	60W	80W
Size(MM)	D500H70	D600H50	D800H70	D1000H70	D1200H70
Lumens	80LM/W				
COL. TEMP	3000K/4000K/6500K/CCT				
DIM. OP	0-10V/1-10V/DALI				
Adjustable	NO				
Material	Aluminium / PC				
Colour	White/Black				
Chip	SMD				
CRI	>80	>90	>90	>90	>90
PF	0.95				
Driver	Included				
Voltage	100-240V				
IP Rating	IP20				
Life	50000 hours				
Warranty	5 Years				



Power	30-40W	40-50W	60-70W	80-90W	90-120W
Size(MM)	D400H50	D600H50	D800H50	D1000H50	D1200H50
Lumens	80LM/W				
COL. TEMP	3000K/4000K/6500K/CCT				
DIM. OP	0-10V/1-10V/DALI				
Adjustable	NO				
Material	Metal+PC				
Colour	White/Black				
Chip	SMD				
CRI	>90				
PF	0.95				
Driver	Included				
Voltage	100-240V				
IP Rating	IP20				
Life	50000 hours				
Warranty	5 Years				