

LED STEP LIGHT



RL-REC-WL-01/02/03-SERIES

HIGH-EFFICIENCY LED GARDEN LIGHT SOLUTION



80LM/W



Warranty



IP54



IK08



Easy installation



0/1-10V/DALI



50,000H



-20°C~ + 50°C



4/10KV



High brightness




Efficient heat dissipation



RL-REC-WL01



3W



5W/10W

RL-REC-WL02



RL-REC-WL03

Applications

Outdoor stairs, sun, passageway, courtyard



Waterproof isolation drive

Easy to deal with thunderstorm weather, prolong the service life of the lamp




Outdoor Protection

IP65 and IK08 ratings ensure reliable operation in demanding outdoor environments. It can also be used normally in extremely cold or high temperature environment



Aluminum lamp body

Surface matte spray paint, not easy to rust

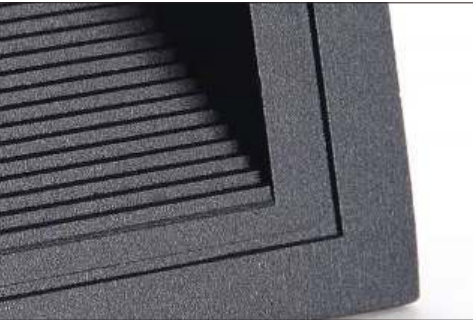

Parameters

Model number	RL-REC-WL01		RL-REC-WL02		RL-REC-WL03	
Power	3W	3W	5W	10W	3W	5W
Material	Aluminum					
Beam angle	110°					
LUMENS	80LM/W					
Color temperature	3000K/4000K/6500K					
Size(mm)	L58*W58*H46	L125*W55*H54	L170*W70*H50	L255*W75*H58	L110*W45*H55	L185*W40*H45
Cut out(mm)	L48*W48*H46	L100*W43*H54	L162*W60*H50	L250*W68*H58	L108*W44*H53	L178*W40*H45
DIM. OP	0-10V/1-10V/DALI					
ADJUSTABLE	NO					
COLOUR	BLACK/WHITE					
CHIP	SMD					
CRI	>80					
PF	0.5					
DRIVER	INCLUDED					
VOLTAGE	100-240V					
IP Rating	IP54					
LIFE	50000 hours					
Warranty	5 Years					

RL-REC-WL-04/05-SERIES

HIGH-EFFICIENCY STEP LIGHT SOLUTION


80LM/W


Warranty


IP54


IK08


Easy installation


0/1-10V/DALI



50,000H


-20°C~ + 50°C


4/10KV


High brightness



Efficient heat dissipation

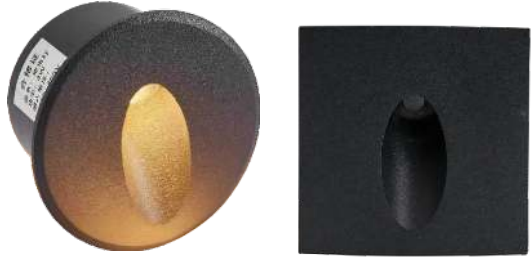

RL-REC-WL-04 RL-REC-WL-05

Aluminum lamp body

Surface matte spray paint, not easy to rust

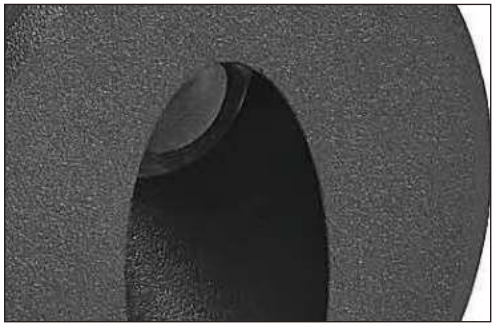

Outdoor Protection

IP65 and IK08 ratings ensure reliable operation in demanding outdoor environments




Parameters

Model number	RL-REC-WL-04			RL-REC-WL-05
Power	3W			
Material	ALUMINIUM+PC			
Beam angle	110°			
LUMENS	80LM/W			
Color temperature	3000K/4000K/6500K			
Size(mm)	φ68*60	φ82*65	L68*W68*H60	L86*W86*H50
Cut out(mm)	φ50*H60	φ65*H65	φ50*H60	L68*W68*H50
DIM. OP	0-10V/1-10V/DALI			
ADJUSTABLE	NO			
COLOUR	BLACK/WHITE			
CHIP	SMD			
CRI	>80			
PF	0.5			
DRIVER	INCLUDED			
VOLTAGE	100-240V			
IP Rating	IP54			
LIFE	50000 hours			
Warranty	5 Years			

Applications

Outdoor stairs, sun, passageway, courtyard

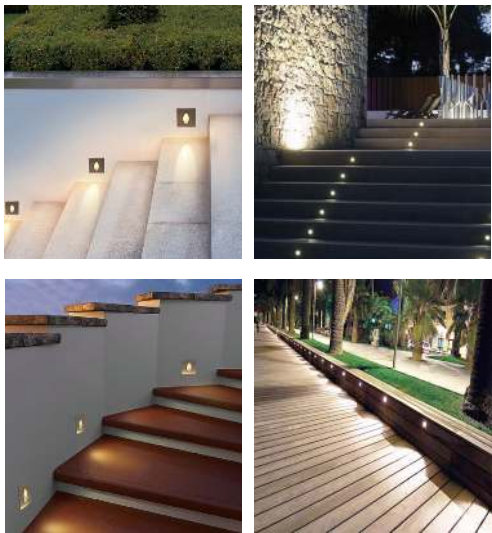

RL-REC-WL-06/07-SERIES

HIGH-EFFICIENCY STEP LIGHT SOLUTION


80LM/W


Warranty


IP54


IK08


Easy installation


0/1-10V/DALI


50,000H


-20°C~ + 50°C


4/10KV


High brightness


Efficient heat dissipation



RL-REC-WL-06 RL-REC-WL-07

Aluminum lamp body

Surface matte spray paint, not easy to rust



Outdoor Protection

IP65 and IK08 ratings ensure reliable operation in demanding outdoor environments




Parameters

Model number	RL-REC-WL-06		RL-REC-WL-07
Power	3W		
Material	ALUMINIUM+Acrylic		ALUMINIUM+Glass
Beam angle	110°		
LUMENS	80LM/W		
Color temperature	3000K/4000K/6500K		
Size(mm)	L90*W51*H64	L135*W51*H65	L86*W86*H50
Cut out(mm)	L82*W42*H64	L122*W42*H64	L68*W68*H50
DIM. OP	0-10V/1-10V/DALI		
ADJUSTABLE	NO		
COLOUR	BLACK/WHITE		
CHIP	SMD		
CRI	>80		
PF	0.5		
DRIVER	INCLUDED		
VOLTAGE	100-240V		
IP Rating	IP54		
LIFE	50000 hours		
Warranty	5 Years		

Applications

Outdoor stairs, sun, passageway, courtyard

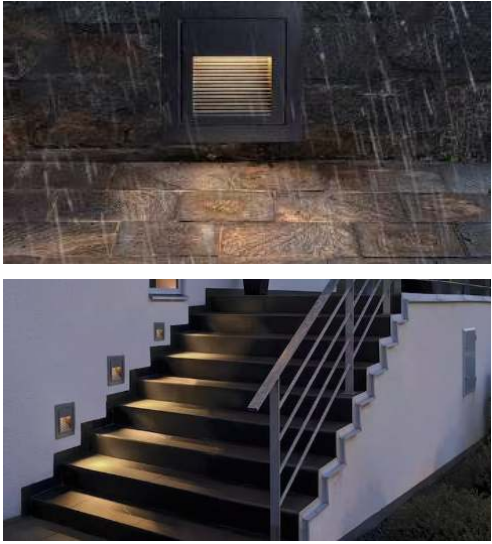

RL-SW2267-SERIES

HIGH-EFFICIENCY STEP LIGHT SOLUTION



60LM/W



Warranty



IP20



Induction



Easy installation



0/1-10V/DALI



50,000H



-20°C~ + 50°C




4/10KV



High brightness




Efficient heat dissipation

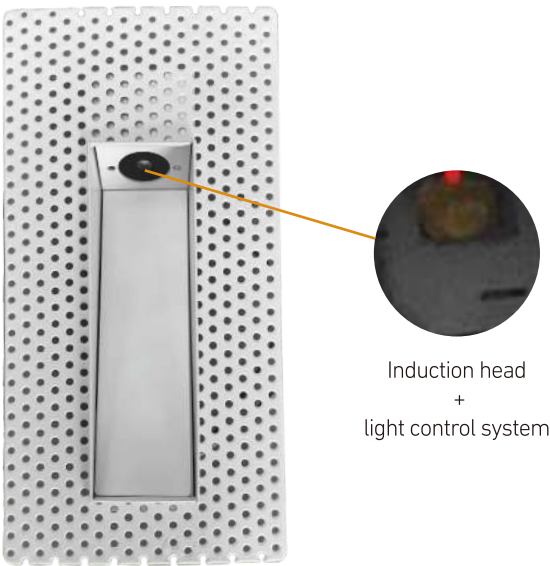

Metal lamp body

Spray painted panel, delicate texture, durable

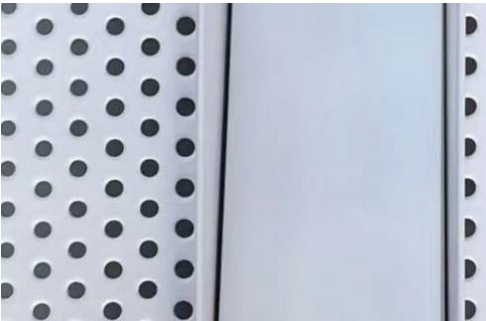

10G radar induction technology

The maximum sensing distance is 3 meters, and the sensing Angle is 120°
(Induction mode adjustable: constant light mode - induction + light control + pure)



Applications

Indoors stairs, sun, passageway, courtyard



Parameters

Model number	RL-SW2267
Power	3W
Material	Aluminum+Iron
Beam angle	15°
LUMENS	60LM/W
Color temperature	3000K/4000K/6500K
Size(mm)	L200*W100*H50
Cut out(mm)	L170*W40*H50
DIM. OP	0-10V/1-10V/DALI
ADJUSTABLE	NO
COLOUR	BLACK/WHITE
CHIP	SMD
CRI	>80
PF	0.5
DRIVER	INCLUDED
VOLTAGE	100-240V
IP Rating	IP20
LIFE	50000 hours
Warranty	5 Years

RL-WL2649-SERIES

HIGH-EFFICIENCY WINDOW SILL LIGHT SOLUTION



80LM/W



Warranty



IP54



IK08



Easy installation



0/1-10V/DALI



50,000H



-20°C~ + 50°C



4/10KV



High brightness



Efficient heat dissipation



RL-WL-2649

RL-WL-2649B

Applications

Indoor indoor use, window sill, door frame, corridor



Aluminum lamp body

Surface matte spray paint, not easy to rust



Optical lens

Multi-refraction optical lens, high transmittance, uniform light



Parameters

Model number	RL-WL-2649	RL-WL-2649B
Power	6W	
Material	Aluminium+PC	
Beam angle	110°	
LUMENS	80LM/W	
Color temperature	3000K/4000K/6500K	
Size(mm)	L150*W60*H102	φ220*H70
DIM. OP	0-10V/1-10V/DALI	
ADJUSTABLE	NO	
COLOUR	BLACK/WHITE	
CHIP	CREE	
CRI	>80	
PF	0.5	
DRIVER	INCLUDED	
VOLTAGE	220V	
IP Rating	IP54	
LIFE	50000 hours	
Warranty	5 Years	

