


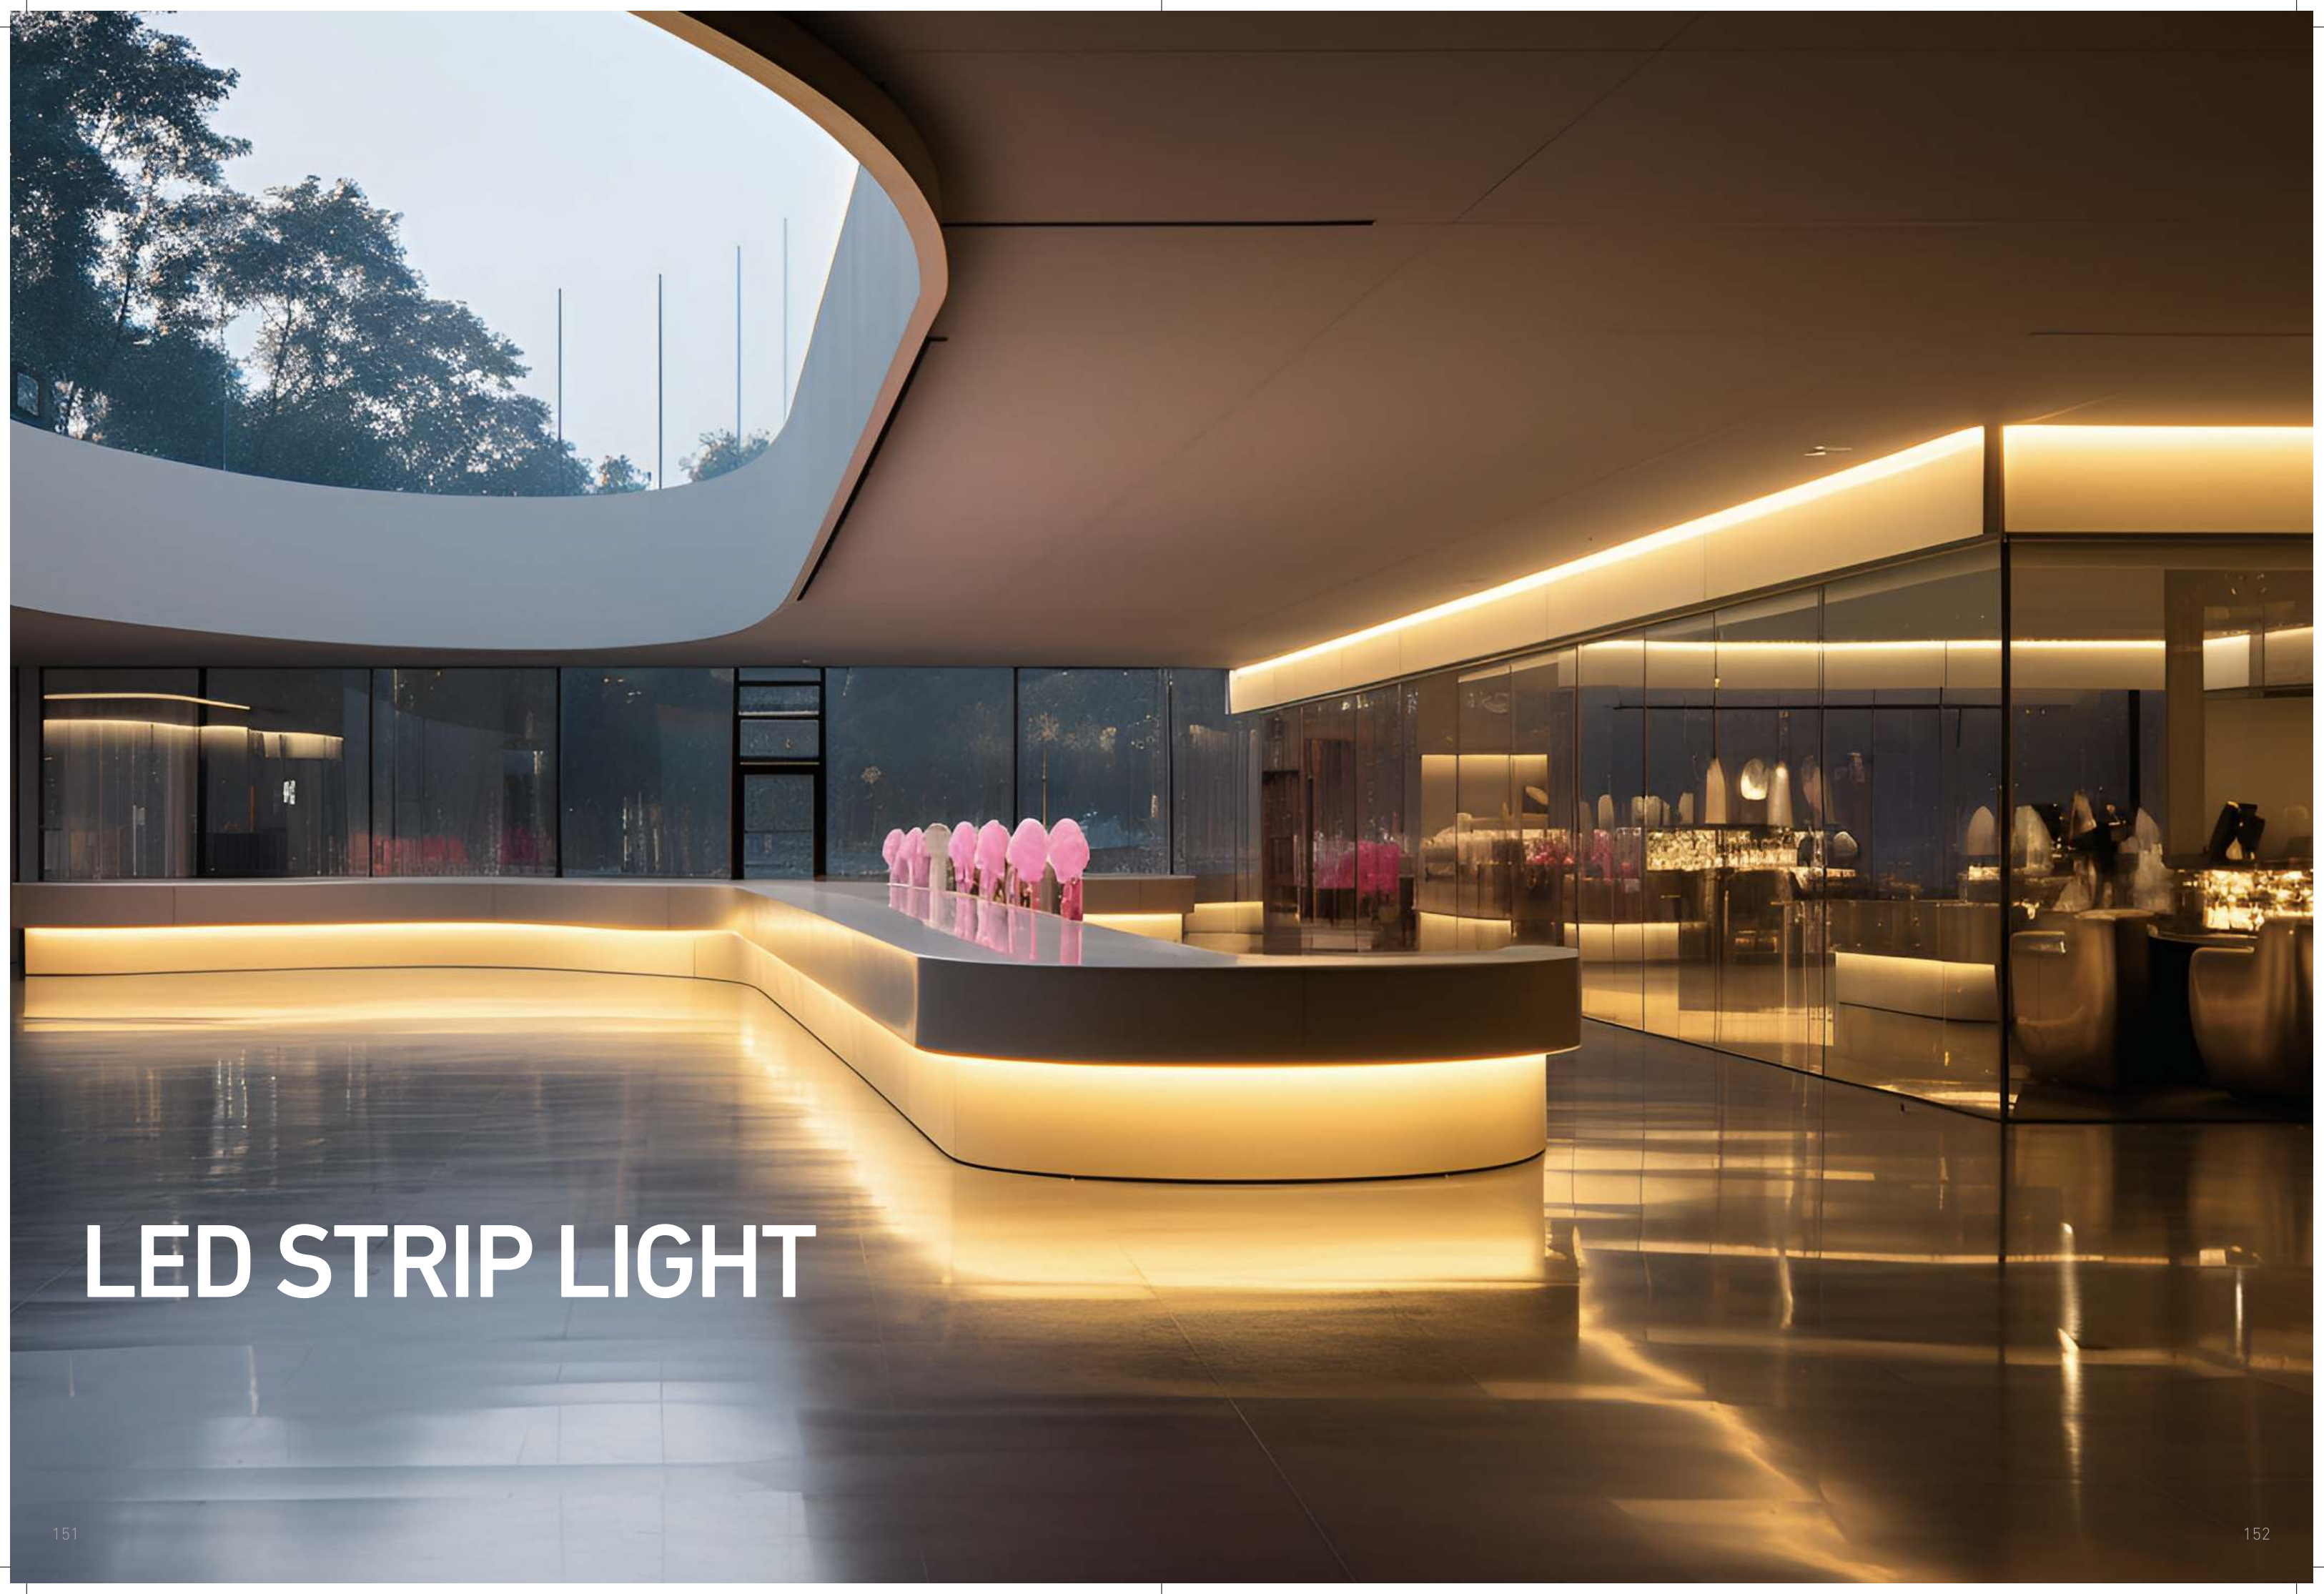

LED STRIP LIGHT

LED STRIP LIGHT

RL-ST1227/1330/1331

3
YEARS

Warranty

High brightness

Easy installation

30,000H

IP65

DC24V

0/1-10V/DALI



RL-ST1227-9W



RL-ST1330-11W



RL-ST1331-13W



Parameters

Mode	RL-ST1227-9W		RL-ST1330-11W	RL-ST1331-13W
COLOR			3000K/4000K/6500K	
Power	9W/M (±10%W)		11W/M (±10%W)	
LED LUMEN			18-20LM/LED	
Voltage			DC24V	
DIM.OP			0-10V/1-10V/DALI	
PCB WIDTH	8MM		12MM	15MM
Shell	ENVIROMENTAL TRANSPARENT PVC COVER			
CRI			Ra≥80	
Waterproof			IP65	
Warranty			3 Years	

RL-ST1229

3/5
YEARS

Warranty

High brightness

Easy installation

50,000H

IP20/65/68

DC24V

0/1-10V/DALI



RL-ST1226-IP20



RL-ST1226-IP65



RL-ST1229-9W-IP20



RL-ST1229-IP65



RL-ST1229-9/15W-IP68

Parameters

Mode	RL-ST1226-IP20		RL-ST1226-IP65		RL-ST1229	
COLOR	3000K/4000K/6500K			3000K/4000K/6500K		
Power	12W			9W	9W	9/15W
Voltage	DC12V			DC24V		
FPCB WIDTH	10MM			10MM		
Mounting	RECESSED / SURFACE					
DIM.OP	0-10V/1-10V/DALI					
CRI	Ra≥80					
Waterproof	IP20		IP65	IP20	IP65	IP68
Warranty	3 Years			3/5 Years	3/5 Years	3/5 Years

LED STRIP LIGHT

RL-ST1335/1237/1238

3/5

YEARS

Warranty

High brightness

Easy installation

LIFESPAN


50,000H

IP20/65/68

DC24V

DIMMING

0/1-10V/DALI

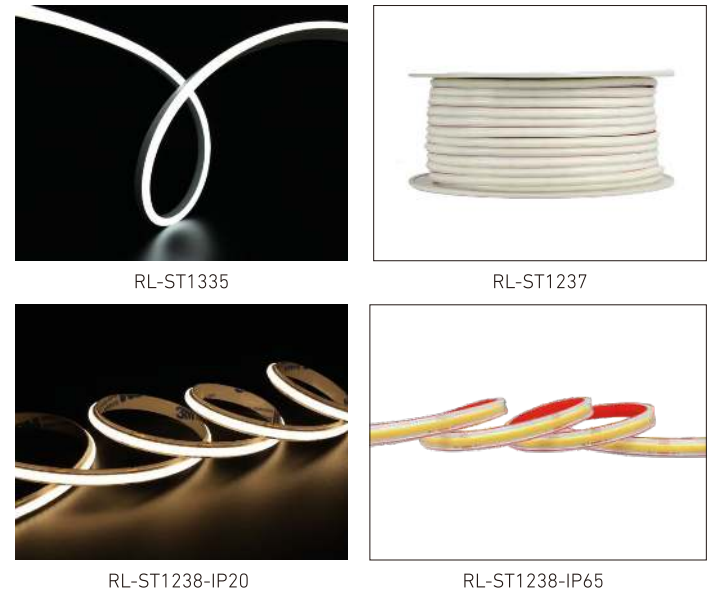

Parameters

Mode	RL-ST1335		RL-ST1237	RL-ST1238
COLOR	3000K-WARM WHITE		3000K/4000K	2700K/3000K/4000K/6500K
Power	7W/10W/16W		12W	10W
Voltage	220V		DC24V	
PCB WIDTH	8*16MM/10*10MM/16*16MM		10*4.5MM	
LED LUMEN	18-20LM/LED			
DIM.OP	0-10V/1-10V/DALI			
CRI	Ra≥80			Ra≥90
Waterproof	IP68	IP65		IP20/IP65
Warranty	3/5 Years			

RL-ST360

3

YEARS

Warranty

High brightness

Easy installation

LIFESPAN

50,000H

IP67

DC24V

DIMMING


0/1-10V/DALI

Parameters

Mode	RL-ST360
CCT	1800-6500K/RGB/RGBW
Material	Silicone
CRI	Ra90
Voltage	DC 24V
IP Rating	IP67
Item Type	Neon Lights
Luminous Efficiency	60LM/W
DIM.OP	0-10V/1-10V/DALI
Light Source	LED
Support Dimmer	No
Working Temperature	-25°C~ -45°C
LED PIN Temperature	Max. 65°C
Storage Temperature	-25°C~ 60°C
Ambient Temperature	Min.-25°C,Max (Table below)
Power(w/m)	Min :3W/M; Max :10 W/M
Lifespan	30,000 hours
WARRANTY	3 Years



Dimensions

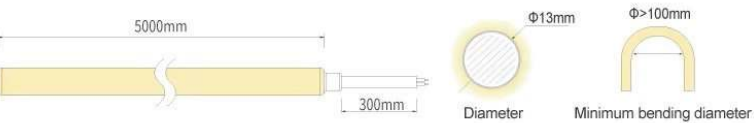

Accessories

