

LED TRACK LIGHT





RL-NWTRK-1M/2M/3M
thickened aluminumHigh quality and safe.
Available in black and white.
Three specifications: 1M, 2M, and 3M.



Joint Accessories



"—" type connector



"L" type connector



Usage effect
"—" type connector



Usage effect
"L" type connector



RL-TR1416-SERIES
Adjustable Track Spotlight

Aperture adjustable from 10° to 60°;
with freely variable zoom and precise lighting;
meeting the illumination needs of various scenes.

Adjustable angle

70LM/W

Warranty

100-240V

10°-60°

IP20

50,000H

0-10V/1-10V/
DALI

Size(MM)



Parameters

Model No.	RL-TR1416-SERIES		
Power	15W	24W	35W
Size(MM)	Ø55*130	Ø65*150	Ø85*175
Lumens	70LM/W		
COL. TEMP	3000K/4000K/6500K		
DIM. OP	0-10V/1-10V/DALI		
Adjustable	YES		
Material	Aluminium / PC		
Colour	White/ Black		
Beam Angle	10°-60°		
Chip	COB		
CRI	>90		
PF	0.95		
Driver	Included		
Voltage	100-240V		
IP Rating	IP20		
Life	50000 hours		
Warranty	5 Years		

Rotary focus with markings, more intuitive.

10°-60° adjustable aperture, meeting your lighting needs.




Focus Scale

Different scales represent different aperture sizes, making it easier to remember and adjust, and providing more convenient lighting.



Adjusting the focus produces different lighting effects.

The rotating lamp head allows you to adjust the lighting effect, suitable for various environments, with spotlight/diffuse light adjustable according to actual needs.

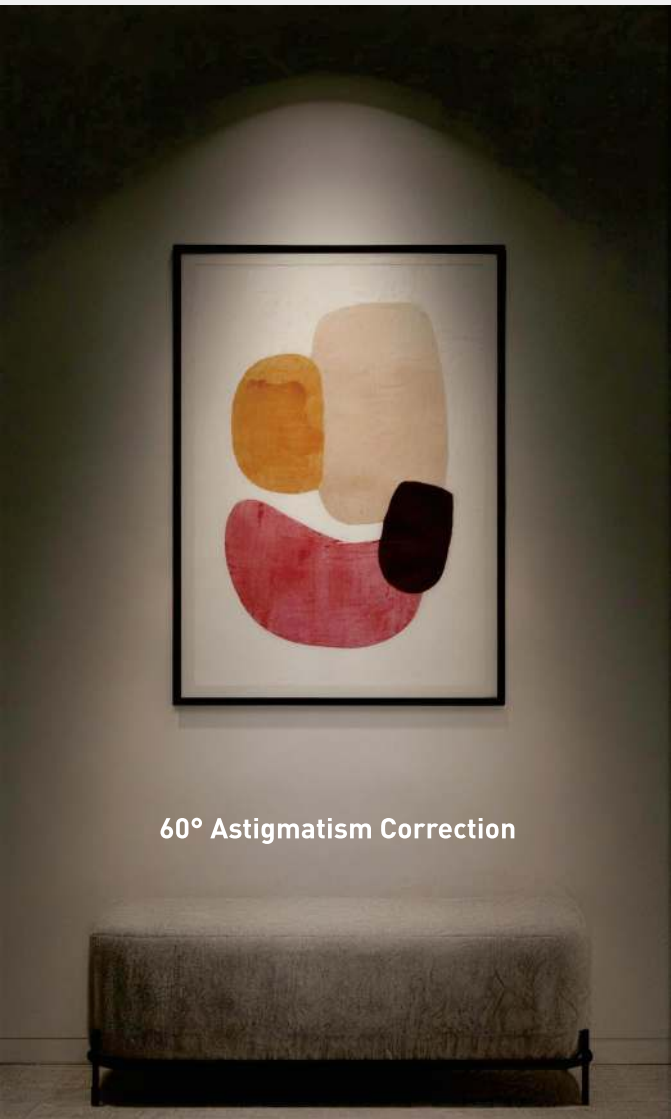



RL-TR1414-SERIES

LED Track Light

COB spotlight with condensing track;
Adjustable;Precise focusing; Fast heat dissipation;
High brightness and durable.



Adjustable
angle



100LM/W



Warranty



100-240V



15° 24°36°



IP20



50,000H



0-10V/1-10V/
DALI

RL-TR1415-SERIES

LED Track Light

COB spotlight with condensing track;
Adjustable;Precise focusing; Fast heat dissipation;
High brightness and durable.



Adjustable
angle



100LM/W



Warranty



100-240V



15° 24°36°55°



IP20



50,000H




0-10V/1-10V/
DALI

Parameters

Model No.	RL-TR1414-SERIES		
Power	15W	24W	35W
Size(MM)	Ø50*120*H123	Ø60*140*H145	Ø75*150*H168
Lumens	100LM/W		
COL. TEMP	3000K/4000K/6500K		
DIM. OP	0-10V/1-10V/DALI		
Adjustable	YES		
Material	Aluminium / PC		
Colour	White/ Black		
Beam Angle	15° 24°36°		
Chip	COB		
CRI	>90		
PF	0.95		
Driver	Included		
Voltage	100-240V		
IP Rating	IP20		
Life	50000 hours		
Warranty	5 Years		



Size(MM)



Size(MM)



Parameters

Model No.	RL-TR1415-SERIES		
Power	15W	20W	30W
Size(MM)	Ø50*120*H123	Ø70*150*H123	Ø75*150*H123
Lumens	100LM/W		
COL. TEMP	3000K/4000K/6500K		
DIM. OP	0-10V/1-10V/DALI		
Adjustable	YES		
Material	Aluminium / PC		
Colour	White/ Black		
Beam Angle	15° 24°36°55°		
Chip	COB		
CRI	>90		
PF	0.95		
Driver	Included		
Voltage	100-240V		
IP Rating	IP20		
Life	50000 hours		
Warranty	5 Years		



RL-TR1417-SERIES
LED Track Light

COB spotlight with condensing track;
Adjustable;Precise focusing; Fast heat dissipation;
High brightness and durable.

Adjustable
angle

100LM/W

Warranty

100-240V

15° 24°36°

IP20

50,000H

0-10V/1-10V/
DALI


Black style



Size

Parameters

Model No.	RL-TR1417-SERIES		
Power	15W	25W	35W
Size(MM)	Ø58*138	Ø74*160	Ø90*180
Lumens	100LM/W		
COL. TEMP	3000K/4000K/6500K		
DIM. OP	0-10V/1-10V/DALI		
Adjustable	YES		
Material	Aluminium / PC		
Colour	White/ Black		
Beam Angle	15° 24°36°		
Chip	COB		
CRI	>90		
PF	0.95		
Driver	Included		
Voltage	100-240V		
IP Rating	IP20		
Life	50000 hours		
Warranty	5 Years		

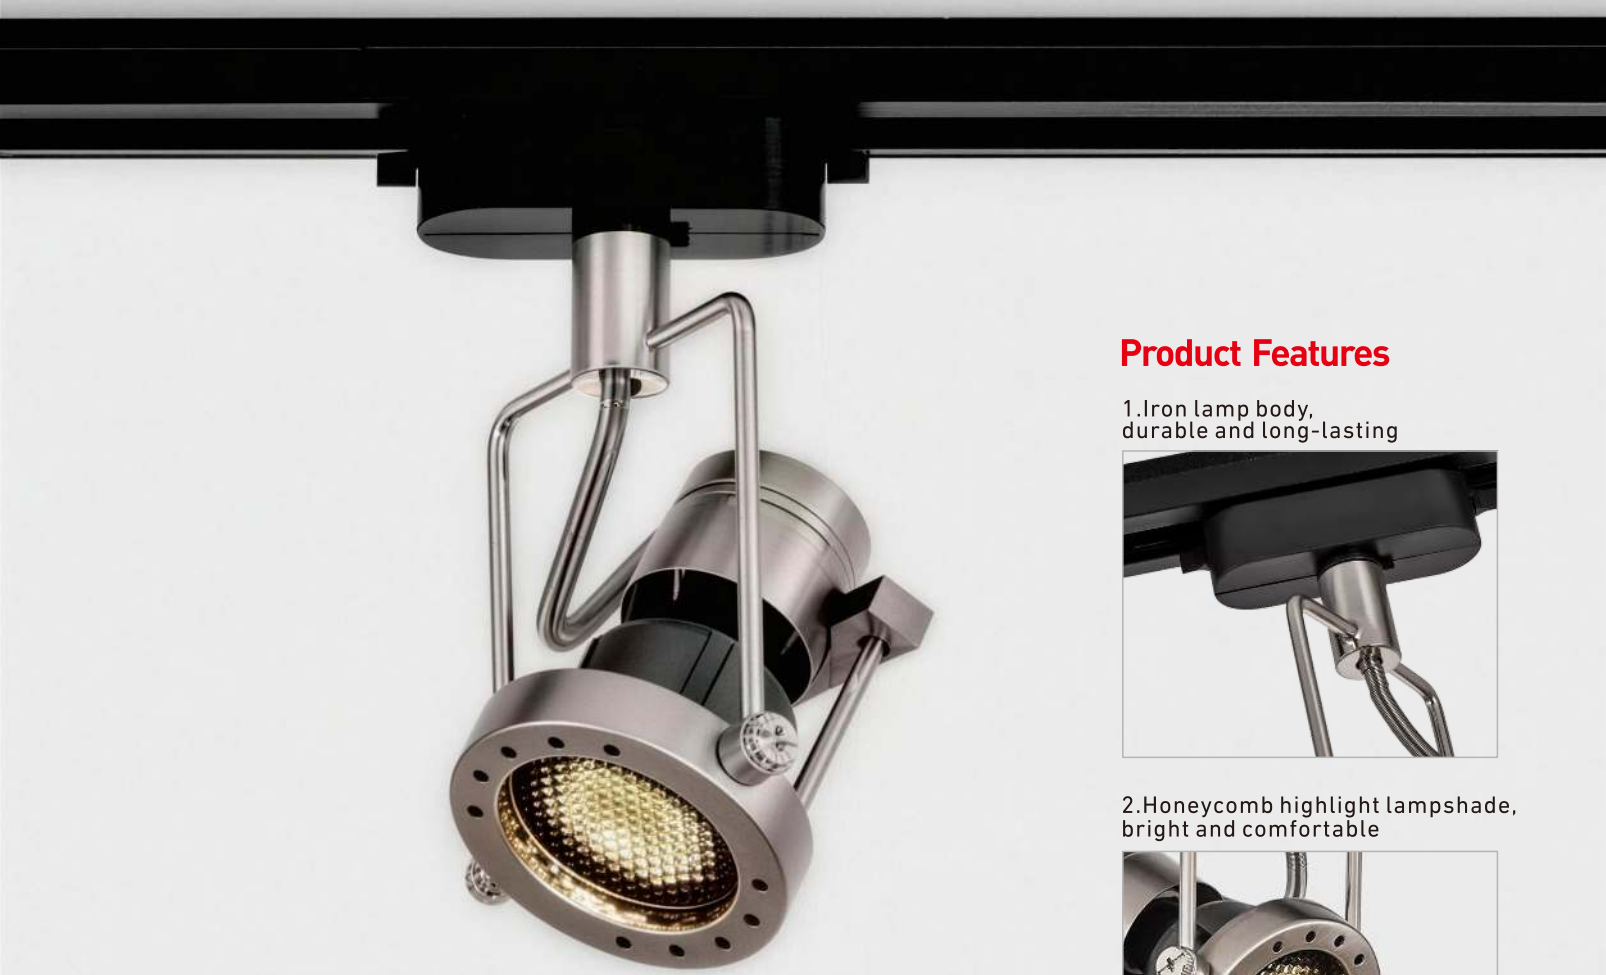

Product Features

- 1.Iron lamp body,
durable and long-lasting
- 2.Honeycomb highlight lampshade,
bright and comfortable

RL-TR1418-SERIES
Industrial Style Honeycomb Track Light

Size



Parameters

Model No.	RL-TR1418-SERIES	
Power	GU10 LIGHT SOURCE	
Size(MM)	95*85*H150	95*100*H150
COL. TEMP	3000K/4000K/6500K	
Adjustable	YES	
PF	0.5	
Driver	Included	
Voltage	100-240V	
IP Rating	IP20	
Life	50000 hours	
Warranty	5 Years	

3.Lights Off Effect




4.The glowing effect after removing
the honeycomb



ACCESSORIES

	Model No.	Product Name
	RL-TS001	Suspension kit 1 mtr rod
	RL-TC-L	L connector
	RL-TC-X	X connector
	RL-TPWR-1	Power connector for single phase
	RL-TMPOW	Middle power connector

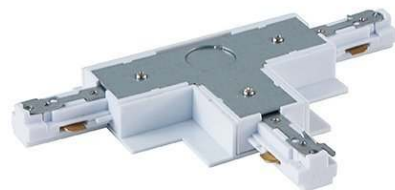	Model No.	Product Name
	RL-TS002	Suspension kit 1.5 mtr wire
	RL-TC-T	T connector
	RL-TC-I	Join connector
	RL-TPWR-3	Power connector for three phase
	RL-TL-END	End caps for single & three phase